

TOWNSHIP 5 SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH.

The following field notes are those of the dependent resurvey of the south boundary (First Standard Parallel South), and the resurvey of mineral survey numbers 6245 and 6249 in T. 4 S., R. 2 E., portions of the southeast and southwest boundaries of the Uintah Indian Reservation, the east and west boundaries, the subdivisional lines, the resurvey of mineral survey numbers 5401, 5524, 5525, 5526, 5540, 6241, 6242, and 6244 and the subdivision of sections 1, 2, 11, and 14, in T. 5 S., R. 2 E., Uintah Special Meridian, Utah.

History of Surveys

Surveyed by

Retr. Or Resurveyed by

SOUTH WEST UINTAH INDIAN RESERVATION BOUNDARY

Portion	C.L. DuBois	1875		
Portion			D. Oaks & H. Bennet Jr	1884
Portion			W.B. Dougall	1898
Portion			R.A. Zaninovich	1991
Portion			M.L. Thompson	2008

SOUTH EAST UINTAH INDIAN RESERVATION BOUNDARY

Portion	D.G. Major	1882		
All	A.H. Brown & F.M. Brown	1903	A.H. Brown & F.M. Brown	1903
Portion			M.L. Thompson	2008

EAST BOUNDARY

All	D.G. Major	1882		
Portion			M.L. Thompson	2008

WEST BOUNDARY

All	R. Collier & H. Rager	1903		
-----	-----------------------	------	--	--

NORTH BOUNDARY

All	D.G. Major	1882		
Portion			R. Collier & H. Rager	1903

SUBDIVISION

Portion	D.G. Major	1882		
Portion	R. Collier & H. Rager	1903	R. Collier & H. Rager	1903

MINING CLAIM SURVEYS

The survey of MS 5401 was executed by J. Glenn in 1905.

The BLM no longer retains the records as to who executed the surveys for MS 5524, MS 5525, and MS 5526. They were executed in 1906. The originals can be obtained from the National Archives.

The survey of MS5540 was executed by O.H. Aikine in 1906.

The surveys of MS6241, MS6242, MS6244, MS6245, and MS6249 were executed by H. D. Heist in 1912.

TOWNSHIP 5 SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH.

The following field notes are those of the dependent resurvey of the south boundary (First Standard Parallel South), and the resurvey of mineral survey numbers 6245 and 6249 in T. 4 S., R. 2 E., portions of the southeast and southwest boundaries of the Uintah Indian Reservation, the east and west boundaries, the subdivisional lines, the resurvey of mineral survey numbers 5401, 5524, 5525, 5526, 5540, 6241, 6242, and 6244 and the subdivision of sections 1, 2, 11, and 14, in T. 5 S., R. 2 E., Uintah Special Meridian, Utah.

History of Surveys

Surveyed by

Retr. Or Resurveyed by

SOUTH WEST UINTAH INDIAN RESERVATION BOUNDARY

Portion	C.L. DuBois	1875		
Portion			D. Oaks & H. Bennet Jr	1884
Portion			W.B. Dougall	1898
Portion			R.A. Zaninovich	1991
Portion			M.L. Thompson	2008

SOUTH EAST UINTAH INDIAN RESERVATION BOUNDARY

Portion	D.G. Major	1882		
All	A.H. Brown & F.M. Brown	1903	A.H. Brown & F.M. Brown	1903
Portion			M.L. Thompson	2008

EAST BOUNDARY

All	D.G. Major	1882		
Portion			M.L. Thompson	2008

WEST BOUNDARY

All	R. Collier & H. Rager	1903		
-----	-----------------------	------	--	--

NORTH BOUNDARY

All	D.G. Major	1882		
Portion			R. Collier & H. Rager	1903

SUBDIVISION

Portion	D.G. Major	1882		
Portion	R. Collier & H. Rager	1903	R. Collier & H. Rager	1903

MINING CLAIM SURVEYS

The survey of MS 5401 was executed by J. Glenn in 1905.

The BLM no longer retains the records as to who executed the surveys for MS 5524, MS 5525, and MS 5526. They were executed in 1906. The originals can be obtained from the National Archives.

The survey of MS5540 was executed by O.H. Aikine in 1906.

The surveys of MS6241, MS6242, MS6244, MS6245, and MS6249 were executed by H. D. Heist in 1912.

DEPENDENT RESURVEY OF A PORTION OF THE SOUTHEAST BOUNDARY
OF THE UINTAH INDIAN RESERVATION IN TOWNSHIP 5 SOUTH,
CHAINS RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

from which an unrecorded bearing object:

A boulder, 5 X 4 X 3 ft. above the ground, bears
N. $37^{\circ}46.2'$ W., 27 links distance, marked X-UIR-BO.

Set a steel fence post alongside the aluminum post.

Corner is located on the right bank of the Green River, and a cliff face extending N-S, is approximately 45 links west of corner.

S. $33^{\circ}35.5'$ W., beginning new measurement.

12.580 Point for Milepost 8, at proportionate distance based on the broken boundary (compass-rule) adjustment; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
S11
8M
UIR
2008

Set a steel fence post alongside the aluminum post.

Corner is located in the Green River bottom, on the east edge of a seasonal pond.

S. $13^{\circ}18.3'$ W., on the 9th Mile of the Uintah Indian Reservation Boundary.

14.481 True point for the closing corner of sections 11 and 14, at proportionate distance; there is no remaining evidence of the original corner; hereinafter described.

39.920 Point for Milepost 8.5, at proportionate distance based on the broken boundary (compass-rule) adjustment; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SOUTHEAST BOUNDARY
OF THE UINTAH INDIAN RESERVATION IN TOWNSHIP 5 SOUTH,
CHAINS RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

T5S
R2E
1/2M
S14
UIR
2008

S. 20°34.1' W., beginning new measurement.

15.271 Point for angle point 39, at proportionate distance base on the broken boundary (compass-rule) adjustment, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T5S
R2E
S14
AP39
UIR
2008

S. 8°17.7' W., beginning new measurement.

17.663 Point for angle point 40, at proportionate distance based on the broken boundary (compass-rule) adjustment; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with magnet at base, and aluminum cap marked:

T5S R2E
S14 AP40
UIR
2008

Corner is located in Green River flood zone.

S. 1°01.7' W., beginning new measurement.

3.633 Intersect the E-W centerline of the SW 1/4 of section 14, hereinafter described.

6.985 Point for Milepost 9, at proportionate distance based on the broken boundary (compass-rule) adjustment; there is no remaining evidence of the original corner.

CHAINS

DEPENDENT RESURVEY OF A PORTION OF THE SOUTHEAST BOUNDARY
OF THE UINTAH INDIAN RESERVATION IN TOWNSHIP 5 SOUTH,
RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:

T5S
R2E
S14
UIR 9M
2008

Corner is located in river flood zone with young willow stands.

S. 11°33.1' W., on the 10th Mile.

17.015 Point for the closing corner of sections 14 and 23, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
S14
S23 CC
UIR
2008

Corner is located in river flood zone. A cottonwood, 40 inches diameter at base of trunk, bears S. 20° E., 23 links distance.

19.959 Point for angle point 41, at proportionate distance based on the broken boundary (compass-rule) adjustment; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
S23
AP41
UIR
2008

Set a steel fence post alongside the aluminum post.

Corner is located in Green River bottom and surrounded by thick underbrush.

CHAINS

DEPENDENT RESURVEY OF A PORTION OF THE SOUTHEAST BOUNDARY
OF THE UINTAH INDIAN RESERVATION IN TOWNSHIP 5 SOUTH,
RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

Reestablishment of the Survey Executed
by A.H. Brown and F.M. Brown in 1903 and
the Resurvey Executed by R.A. Zaninovich in 1991

S. 26°19.7' W., beginning new measurement.

19.965 Point for Milepost 9.5, at proportionate distance based on the broken boundary (compass-rule) adjustment; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
S23
UIR 1/2M
S11
T9SR19E
2008

N. 71°53.4' W., beginning new measurement.

3.093 Point for the closing corner of sections 22 and 23, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

C C
T5S R2E
S22 S23
S11 UIR
T9SR19E
2008

Reestablishment of the Survey Executed by C.L. DuBois in 1875 and the Resurvey Executed by D.C. Oaks and H.P. Bennet Jr. in 1884, W.B. Dougall in 1898, and R.A. Zaninovich in 1991.

With continuous measurement.

CHAINS

DEPENDENT RESURVEY OF A PORTION OF THE SOUTHEAST BOUNDARY
OF THE UINTAH INDIAN RESERVATION IN TOWNSHIP 5 SOUTH,
RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

- 14.416** The initial point for the southwest boundary of the Uintah Indian Reservation, monumented with an aluminum post, 2 1/2 inches diameter, firmly set in a mound of stone, 3 ft. base, 12 inches high to top of aluminum cap marked as described in the official record of the 1991 resurvey, Group 749. Alongside this same point is a cobble stone, 12 X 10 X 5 inches, set in a mound of stone, marked UIR.

Corner is located under a barbed wire fence, extending SE-NW.

Dependent Resurvey of a portion of the Southwest Boundary
of the Uintah Indian Reservation, in Township 5 South,
Range 2 East, Uintah Special Meridian, Utah

N. 59°21.7' W., on the 1st Mile of the Uintah Indian Reservation Boundary.

- 32.156** The closing corner of sections 15 and 22, monumented with a decayed and flaky sandstone, 20 X 13 X 4 inches, projecting 14 inches above the ground, no visible marks.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and the aluminum cap marked:

```

      T5SR2E
      /
     S15
    /   \
T9S S22 --- CC
R19E
      \
       2008
  
```

Deposit the stone alongside the aluminum post.

- 79.853** Milepost 1, monumented with a rebar, 3/4 inches diameter, firmly set in a collar of stone, projecting 6 inches above solid sandstone, with aluminum cap marked as described in the official record of the 1991 resurvey, Group 749.

Corner is located under a barbed wire fence, extending NW-SE.

Reestablishment of the Survey Executed by C.L. DuBois in 1875
and the Resurvey Executed by D.C. Oaks and
H.P. Bennet Jr. in 1884, W.B. Dougall in 1898

N. 58°34.1' W., on the 2nd Mile of the Uintah Indian Reservation Boundary.

DEPENDENT RESURVEY OF A PORTION OF THE SOUTHWEST BOUNDARY
OF THE UINTAH INDIAN RESERVATION IN TOWNSHIP 5 SOUTH,
CHAINS RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

- 0.925** The closing corner of sections 15 and 16, monumented with a sandstone, 20 X 16 X 4 inches, firmly set, marked with an X on top, with a mound of stone, 2 ft. base, 1 ft. high north, 2 links distance.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:

C C
T5S R2E
S16 S15
S10 UIR
T9SR19E
2008

Deposit the marked stone alongside the aluminum post.

Corner is located in rocky, rolling hills, under a barbed wire fence, extending NW-SE.

- 80.418** Milepost 2, determined at the center of a mound of stone, 5 ft. base, 1 ft. high; no marked stone found.

At the corner point, (center of the mound)

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground to bedrock, with magnet at base, in a mound of stone, 5 ft. base to top of aluminum cap marked:

T5SR2E
UIR S16
2M
S4
T9SR19E
2008

Corner is located under a barbed wire fence, extending NW-SE.

N. 56°39.6' W., on the 3rd Mile of the Uintah Indian Reservation Boundary.

- 14.723** The closing corner of sections 16 and 17, monumented with a sandstone, 20 X 14 X 4 inches, loosely set and marked with 4 grooves on one edge.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 8 inches in the ground to solid rock, with magnet at base, in a

DEPENDENT RESURVEY OF A PORTION OF THE SOUTHWEST BOUNDARY
OF THE UINTAH INDIAN RESERVATION IN TOWNSHIP 5 SOUTH,
CHAINS RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

mound of stone, 4 ft. base to top of aluminum cap marked:

T5SR2E
S17 | S16
S4 \ UIR
CC
T9SR19E
2008

Deposit the marked stone in the mound of stone alongside the aluminum post.

Corner is located 0.75 links north of a barbed wire fence, extending NW-SE. A 20 ft. high hill extends north and west, 38 links distance.

- 23.749** The closing corner of sections 8 and 17, monumented with a sandstone, 20 X 12 X 7 inches, set 8 inches in the ground, marked with 4 notches on south face and 2 notches on north face. The west face is marked with UUIR/T9S and UIR on east face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
S4 \ UIR S8
CC \ S17
T9SR19E
2008

Corner is located on a south sloping hill, under a barbed wire fence, extending NW-SE.

- 79.578** Milepost 3, monumented with a sandstone, 18 X 10 X 6 inches, loosely set on its side, marked with UIR on north face and UUIR on south face; with a mound of stone north of the corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
UIR S8
3M
S5
T9SR19E
2008

Deposit the marked stone alongside the aluminum post.

Corner is located on flat ground, under a barbed wire fence,

CHAINS

DEPENDENT RESURVEY OF A PORTION OF THE SOUTHWEST BOUNDARY
OF THE UINTAH INDIAN RESERVATION IN TOWNSHIP 5 SOUTH,
RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

extending NW-SW. A two track road and gate extends west, 12.13 chains distance.

N. $59^{\circ}16.9'$ W., on the 4th Mile of the Uintah Indian Reservation Boundary.

30.305 True point for the closing corner of sections 7 and 8, hereinafter described.

80.025 Milepost 4, monumented with a sandstone, 17 X 7 X 4 inches, firmly set, marked UIR on south face, 4 on east face, and UIR on north face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
UIR S7
S31 4M
T8SR19E
2008

Deposit the marked stone alongside the aluminum post.

Corner is located under a barbed wire fence, extending NW-SE.

N. $57^{\circ}05.4'$ W., on the 5th Mile of the Uintah Indian Reservation Boundary.

15.944 Point for the closing corner of sections 6 and 7, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
UIR S6 CC
S31 S7
T8SR19E
2008

Corner is located in a small hollow, drains SW, and under a barbed wire fence, extending NW-SE.

41.920 Point for the closing corner of sections 1 and 6, T. 5 S., Rs. 1 and 2 E., at proportionate distance; there is no remaining evidence of the original corner.

CHAINS

DEPENDENT RESURVEY OF A PORTION OF THE SOUTHWEST BOUNDARY
OF THE UINTAH INDIAN RESERVATION IN TOWNSHIP 5 SOUTH,
RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T5S
R1E CC R2E
S1 | S6
T8SR19E
2008

Corner is located 9 links south of a barbed wire fence, extending NW-SE.

81.440

Milepost 5, monumented with a decayed sandstone, 13 X 12 X 5 inches, dimly marked and in a scattered mound of stone.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR1E
UIR S1
S31 5M
T8SR19E
2008

Corner is located under a barbed wire fence, extending NW-SE, on the west edge of a cattle guard.

Dependent Resurvey of the South Boundary,
(First Standard Parallel South)
in Township 4 South, Range 2 East,
Uintah Special Meridian, Utah

Reestablishment of the Survey Executed
by D.G. Major in 1882

From the standard corner of sections 31 and 36, T. 4 S., Rs. 2 and 3 E., on the First Standard Parallel South, monumented with an aluminum post, 2 1/2 inches diameter, firmly set, projecting 6 inches above the ground, with aluminum cap marked as described in the official record of the 2007-08 resurvey of T. 5 S., R. 3 E.

S. 87°56.5' W., along the south boundary of section 36.

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY, FIRST STANDARD PARALLEL
SOUTH IN TOWNSHIP 4 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

4.891

True point for the closing corner of sections 1 and 6, Township 5 South, Ranges 2 and 3 East; hereinafter described.

20.808

Point for the standard E 1/16 section corner of section 36 only, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

SC
T4SR2E
E 1/16 S36

2008

Set a steel fence post alongside the aluminum post.

24.875

Point for the E 1/16 section corner of section 1 only, Township 5 South, Range 2 East.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T4SR2E
E 1/16 S1
T5SR2E
2008

Set a steel fence post alongside the aluminum post.

41.616

The standard 1/4 section corner of section 36 only, monumented with a cobble stone, 18 X 11 X 3 inches, loosely set, and dimly marked. Found a cottonwood post lying loose alongside the corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

SC
T4SR2E
1/4 S36

2008

Deposit the stone alongside the aluminum post.

Corner is located on the south edge of drainage, course west.

TOWNSHIP 5 SOUTH, RANGE 2 EAST, UTAH SPECIAL MERIDIAN, UTAH.

PRIVATE SURVEYS

A survey was executed by Clinton S. Peatross, L.S. 4779, per record of survey plat No. 402 dated March 28, 1988 and filed March 28, 1988 at the Uintah County Recorder's Office.

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 1076, dated July 18, 2008.

The direction of the lines was determined by references to true meridians, established by Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the Standards and Guidelines for Cadastral Surveys Using Global Positioning System Methods, dated May 9, 2001, Version 1.0. Trimble model 5800 GPS receivers were used for field collection. Cadastral Automated Plat Drafting (CAPD) software was the primary software utilized for the project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and search was made for all corners and other calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Geodetic control was derived from GPS static observations, post processed by the National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuously Operating Reference Stations (CORS): RED BUTTE CORS ARP, WANSHIP_UT2004 CORS ARP, and RIFLE_GCL_CO2006 CORS ARP.

The geographic position of the 1/4 section corner of sections 14 and 15, as determined by direct RTK methods from the National Geodetic Survey OPUS solution, is as follows:

Latitude: 40°02'58.577" N.

Longitude: 109°44'44.123" W., N.A.D., 1983,

Network Accuracy = 0.200 meter at 95% confidence.

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY, FIRST STANDARD PARALLEL
SOUTH IN TOWNSHIP 4 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

N. 89°39.9' W., beginning new measurement.

- 3.241 Point for the 1/4 section corner of section 1 only, Township 5 South, Range 2 East, at midpoint between the closing corners.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T4SR2E
1/4 S1
T5SR2E
2008

Set a steel fence post alongside the aluminum post.

- 7.598 Intersect line 2-3 of mineral survey 6245, Little Boy lode, not monumented.

- 12.007 Intersect line 1-4 of mineral survey 6245, Little Boy lode, not monumented.

- 19.839 Point for the standard W 1/16 section corner of section 36 only, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T4SR2E
W 1/16 S36
2008

Set a steel fence post alongside the aluminum post.

Corner is located on the south edge of a ridge, extends SW-NE.

- 23.212 Point for the W 1/16 section corner of section 1 only, Township 5 South, Range 2 East.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T4SR2E
W 1/16 S1
T5SR2E
2008

Set a steel fence post alongside the aluminum post.

Corner is located on a gentle north facing slope.

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY, FIRST STANDARD PARALLEL
SOUTH IN TOWNSHIP 4 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

39.678

The standard corner of sections 35 and 36, monumented with a decayed sandstone set in the center of a scattered mound of stone, 2 ft. base. Found an old wooden post lying loose alongside corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, in a mound of stone, 2 ft. base to top of aluminum cap marked:

SC
T4S R2E
S35 S36
2008

Deposit the stone and the old wooden post alongside the aluminum post.

Corner is located in a saddle on the north side a ridge, extending E-W.

S. 89°59.4' W., along the south boundary of section 35.

3.505

Point for the closing corner of sections 1 and 2, Township 5 South, Range 2 East, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T4SR2E
S35
S2 S1
T5S R2E
CC
2008

Set a steel fence post alongside the aluminum post.

Corner is located on a ridge, extends SW-NE.

From the corner point, a 1/2 inch rebar bears N. 64°16.5' W., 60 **links** distance, with a 3/4 inch red, plastic cap marked LS4779 as recorded on the survey plat executed by Clinton S. Peatross.

Reestablishment of the Survey Executed
by R.E. Collier & H. Rager in 1903

With continuous measurement.

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY, FIRST STANDARD PARALLEL
SOUTH IN TOWNSHIP 4 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

40.056

Point for the standard 1/4 section corner of section 35 only, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T4SR2E
1/4 S35

2008

Corner is located in the middle of a wide wash.

44.931

Point for the 1/4 section corner of section 2 only, Township 5 South, Range 2 East, at proportionate distance. This corner was not monumented in the original survey.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T4SR2E
1/4 S2

T5SR2E
2008

Corner is located in the middle of a wide wash.

80.112

The standard corner of sections 34 and 35, monumented with a sandstone, 16 X 13 X 4 inches, lying loose, with illegible marks, with a scattered mound of stone north of the corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 18 inches in the ground to solid rock, with magnet at base, in a mound of stone, 3 ft. base, 10 inches high, with aluminum cap marked:

SC
T4S | R2E
S34 | S35

2008

Deposit the stone at base of the mound of stone.

Corner is located on a SW facing slope.

S. 89°53.7' W., along the south boundary of section 34.

4.882

The closing corner of sections 2 and 3, Township 5 South, Range 2 East, monumented with a decayed and broken sandstone, loosely

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY, FIRST STANDARD PARALLEL
SOUTH IN TOWNSHIP 4 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

set, with illegible marks' with a scattered mound of stone south of the corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, with magnet at base, in a mound of stone, 2 ft. base, 8 inches high, with aluminum cap marked:

T4SR2E
S34

S3 | S2
T5S | R2E
CC
2008

Corner is located on a north facing slope.

- 39.872** The standard 1/4 section corner of section 34 only, monumented with a slightly decayed black sandstone, 18 X 8 X 6 inches, lying loose on south face, plainly marked 1/4 on north face, with a scattered mound of stone north of the corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, in a mound of stone, 3 ft. base to top of aluminum cap marked:

SC
T4SR2E
1/4 S34

2008

Deposit the marked stone at base of the mound of stone.

N. 89°59.6' W., beginning new measurement.

- 4.950** Point for the 1/4 section corner of section 3 only, Township 5 South, Range 2 East, at midpoint between closing corners.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground to solid rock, with magnet at base, in a mound of stone, 3 ft. base, 8 inches high with aluminum cap marked:

T4SR2E
1/4 S3

T5SR2E
2008

Set a steel fence post alongside the aluminum post.

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY, FIRST STANDARD PARALLEL
SOUTH IN TOWNSHIP 4 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Corner is located on the west bank of a small drainage, course SW.

- 40.017 The standard corner of sections 33 and 34, determined at the center of a mound of stone, 3 ft. base, 2 ft. high; with several broken sandstone alongside, no visible marks.

At the corner point (center of the mound)

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 18 inches in the ground, with magnet at base, in a mound of stone, 3 ft. base to top of aluminum cap marked:

SC
T4S R2E
S33 S34
2008

S. 89°49.4' W., along the south boundary of section 33.

- 4.873 True point for the closing corner of sections 3 and 4, Township 5 South, Range 2 East, hereinafter described.

- 39.980 The standard 1/4 section corner of section 33 only, monumented with a cobble stone, 17 X 10 X 7 inches, firmly set, projecting 8 inches above the ground, plainly marked SC 1/4 on north face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

SC
T4SR2E
1/4 S33

2008

Deposit the marked stone alongside the aluminum post.

S. 89°57.3' W., beginning new measurement.

- 4.873 Point for the 1/4 section corner of section 4 only, Township 5 South, Range 2 East, at midpoint between closing corners.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY, FIRST STANDARD PARALLEL
SOUTH IN TOWNSHIP 4 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

T4SR2E

1/4 S4

T5SR2E

2008

Set a steel fence post alongside the aluminum post.

Corner is located on a flat plateau and a two track road extends east, 450 links distance.

39.980 Point for the standard corner of sections 32 and 33, at proportionate distance; there is no remaining evidence of the original corner.

Set a brass tablet, 3 1/4 inches diameter, with a 3 1/2 inch stem, with magnet at base, flush with sandstone, in cement bond into a drill hole on solid rock, marked::

SC
T4S | R2E
S32 | S33
2008

Raise a mound of stone, 2 ft. base, 1 ft. high, north of the brass tablet.

Corner is located on a sandstone ledge, extends N-S. The edge of said ledge bears west, 13 links distance.

S. 89°57.3' W., along the south boundary of section 32.

4.873 The closing corner of sections 4 and 5, Township 5 South, Range 2 East, monumented with a decayed sandstone, 20 X 14 X 6 inches, firmly set, projecting 7 inches above the ground.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T4SR2E
S5 | S4
T5S | R2E
CC
2008

Deposit the decayed stone alongside the aluminum post.

Corner is located in a low wash, course west.

39.980 Point for the standard 1/4 section corner of section 32 only, at proportionate distance; there is no remaining evidence of the

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY, FIRST STANDARD PARALLEL
SOUTH IN TOWNSHIP 4 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

SC
T4SR2E
1/4 S32

2008

- 44.845 Point for the 1/4 section corner of section 5 only, Township 5 South, Range 2 East, at midpoint between closing corners.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T4SR2E
1/4 S5
T5SR2E
2008

- 79.960 Point for the standard corner of sections 31 and 32, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

SC
T4S | R2E
S31 | S32
2008

Set a steel fence post alongside the aluminum post.

Corner is located on a gentle SW facing slope.

S. 89°57.3' W., along the south boundary of section 31.

- 4.857 Point for the closing corner of sections 5 and 6, Township 5 South, Range 2 East, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY, FIRST STANDARD PARALLEL
SOUTH IN TOWNSHIP 4 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

T4SR2E
S31
S6 | S5
T5S | R2E
CC
2008

Set a steel fence post alongside the aluminum post.

Corner is located on gentle south facing slope.

10.215 Intersect line 1-21 of mineral survey 5401, Florence Mining Claim.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T4SR2E
S31
S6
MS5401
2008

Set a steel fence post alongside the aluminum post.

Corner is located on a gentle NW facing sandy slope.

39.980 The standard 1/4 section corner of section 31 only, determined at the center of a mound of stone, 2 ft. base, 1/2 ft. high.

At the corner point (center of the mound)

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, with magnet at base, in a mound of stone, 3 ft. base to top of aluminum cap marked:

SC
T4SR2E
1/4 S31
2008

Corner is located on flat ground, draining SE.

S. 89°54.3' W., beginning new measurement.

0.324 Intersect line 11-12 of mineral survey 5401, Florence Mining Claim.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 14 inches in the ground to solid rock, with magnet at base, in a mound of stone, 3 ft. base to top of aluminum cap marked:

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY, FIRST STANDARD PARALLEL
SOUTH IN TOWNSHIP 4 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

S31 MS5401
S6
T5SR2E
2008

Set a steel fence post alongside the aluminum post.

Corner is located in drainage, 6 links wide, course SE.

- 4.891 Point for the 1/4 section corner of section 6 only, Township 5 South, Range 2 East, at proportionate distance. This corner was not monumented in the original survey.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, in a mound of stone, 3 ft. base to top of aluminum cap marked:

T4SR2E
1/4 S6
T5SR2E
2008

Set a steel fence post alongside the aluminum post.

- 9.330 Intersect line 12-13 of Mineral Survey 5401, Florence Mining Claim.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

MS5401 T4S
R2E
S31
S6
T5S
2008

Set a steel fence post alongside the aluminum post.

- 40.048 The standard corner of sections 31 and 36, determined at the center of a scattered mound of stone. This corner will now function as an angle point along the south boundary of section 31.

At the corner point (center of the mound)

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 18 inches in the ground to solid rock, with magnet at base, in a mound of stone, 2 ft. base, 10 inches high, with aluminum cap marked:

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY, FIRST STANDARD PARALLEL
SOUTH IN TOWNSHIP 4 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

AP
T4SR2E
S31
S6
T5SR2E
2008

Set a steel fence post alongside the aluminum post.

Corner is located on the south edge of a wash. An oil access road bears west, approximately 530 links distance.

S. 89°40.7' W., beginning new measurement.

0.576 Intersect the line 14 and 15 of Mineral Survey 5401, Florence Mining Claim.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, in a mound of stone, 3 ft. base to top of aluminum cap marked:

T4S
R2E
S31 / MS5401
S6
T5S
2008

Set a steel fence post alongside the aluminum post.

2.428 The closing corner of sections 1 and 6, Township 5 South, Ranges 1 and 2 East, monumented with a sandstone, 25 X 12 X 4 inches, firmly set in a mound of stone, 2 ft. base, 6 inches high.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 10 inches in the ground to solid rock, with magnet at base, in a mound of stone, 3 ft. base, 1 1/2 ft. high, with aluminum cap marked:

T4SR2E
31
S1 | S6
R1E | R2E
T5S
CC
2008

Set a steel fence post alongside the aluminum post.

Corner is located 300 links east of an oil access road.

6.182 From this point, the closing corner of sections 31 and 36,

TOWNSHIP 5 SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH.

CHAINS

Dependent Resurvey of a portion of the Southeast Boundary of the
 Uintah Indian Reservation,
 in Township 5 South, Range 2 East,
 Uintah Special Meridian, Utah

Reestablishment of the Survey Executed by
 A.H. Brown and F.M. Brown in 1903 and the Resurvey Executed by
 Michael L. Thompson in 2007-2008.

Beginning at the point of intersect on the E-bdy. of the township with the southeast boundary of the Uintah Indian Reservation, not monumented. From which the N 1/16 section corner, bears **North, 4.637** chains distance, as described in the official record of the 2007-2008 resurvey, Group 1040, Utah.

N. 68°03.3' W., on the 6th Mile of the Uintah Indian Reservation boundary.

0.860 Point for the 5.5 mile corner, T. 5 S., R. 2 E., falls in the flood plain of the Green River in dense stands of willow, Russian olive, and scattered cottonwoods. There is no remaining evidence of the original corner, not monumented.

N. 34°31.9' W., beginning new measurement.

10.990 Point for angle point 21, falls in the flood plain of the Green River in dense stand of willow, Russian olive, and scattered cottonwoods. There is no remaining evidence of the original corner, not monumented.

N. 30°02.1' E., beginning new measurement.

4.996 Point for angle point 22, falls in the flood plain of the Green River in dense stand of willow, Russian olive, and scattered cottonwoods. There is no remaining evidence of the original corner, not monumented.

N. 42°17.7' E., beginning new measurement.

4.996 Point for angle point 23, falls in the flood plain of the Green River in dense stands of willow, Russian olive, and scattered cottonwoods. There is no remaining evidence of the original corner, not monumented.

N. 15°45.8' W., beginning new measurement.

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY, FIRST STANDARD PARALLEL
SOUTH IN TOWNSHIP 4 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Townships 4 South, Ranges 1 and 2 East, bears **South, 0.028** chains distance, monumented with a sandstone, 20 X 13 X 3 inches, firmly set, projecting 11 inches above the ground, with a mound of stone north of the corner.

At the corner point (original stone)

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

AM	
CC	
T4S	
R1E	R2E
<u>S36</u>	<u>S31</u>
2008	

Deposit the stone alongside the aluminum post.

Corner is located on flat ground on the east edge of road, extends NE-SW.

From this same point, the standard 1/4 section corner of section 36 only, Township 4 South, Range 1 East, bears **S. 89°40.7' W., 33.794** chains distance, monumented with a sandstone, 18 X 11 X 5 inches, firmly set, with illegible marks, with a mound of stone north of the corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

SC
T4SR1E
1/4 S36

2008

Deposit the marked stone alongside the aluminum post.

Corner is located on the north edge of a ridge, extends E-W.

Dependent Resurvey of the East Boundary of Township 5 South,
Range 2 East, Uinta Special Meridian, Utah

Reestablishment of the Survey Executed by D.G. Major in 1882,
and the Resurvey Executed by M.L. Thompson in 2007.

DEPENDENT RESURVEY OF THE EAST BOUNDARY, OF
TOWNSHIP 4 SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

From the true point for the meander corner of sections 7 and 12, on the present right bank of the Green River. Not monumented.

NORTH, between sections 7 and 12.

- 3.906** The witness corner to the meander corner of the present right bank of the Green River, monumented with an aluminum post, 2 1/2 inches diameter, projecting 4 inches above ground, with an aluminum cap marked as described in the official record of the 2007 resurvey of the West boundary of Township 5 South, Range 3 West.
- 9.442** The 1/4 section corner of sections 7 and 12, monumented with an aluminum post, 2 1/2 inches diameter, projecting 4 inches above ground, with an aluminum cap marked as described in the official record of the 2007 resurvey of the West boundary of Township 5 South, Range 3 West.
- 17.460** The witness corner to the meander corner of the present left bank of the North Channel of the Green River, monumented with an aluminum post, 2 1/2 inches diameter, projecting 4 inches above ground, with an aluminum cap marked as described in the official record of the 2007 resurvey of the West boundary of Township 5 South, Range 3 West.
- 18.584** True point for the meander corner of the present left bank of the North Channel of the Green River. Not monumented.
- 18.962** The thread of the dry North Channel of the Green River. Not monumented.
- 19.227** True point for the meander corner of the present right bank of the North Channel of the Green River. Not monumented.
- 24.564** The witness corner to the meander corner of the present right bank of the North Channel of the Green River, monumented with an aluminum post, 2 1/2 inches diameter, projecting 4 inches above ground, with an aluminum cap marked as described in the official record of the 2007 resurvey of the West boundary of Township 5 South, Range 3 West.
- 24.805** Intersect the southeast boundary of the Uintah Indian Reservation. Not monumented.
- 29.442** The N 1/16 section corner of sections 7 and 12, monumented with an aluminum post, 2 1/2 inches diameter, projecting 2 inches above ground, with an aluminum cap marked as described in the official record of the 2007 resurvey of the West boundary of Township 5 South, Range 3 West.

DEPENDENT RESURVEY OF THE EAST BOUNDARY, OF
TOWNSHIP 4 SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

49.442

The corner of sections 1, 6, 7 and 12, monumented with an aluminum post, 2 1/2 inches diameter, projecting 6 inches above ground, with an aluminum cap marked as described in the official record of the 2007 resurvey of the West boundary of Township 5 South, Range 3 West.

N. 0°45.1' W., between sections 1 and 6.

20.010

The S 1/16 section corner of sections 1 and 6, monumented with an aluminum post, 2 1/2 inches diameter, projecting 4 inches above ground, with an aluminum cap marked as described in the official record of the 2007 resurvey of the West boundary of Township 5 South, Range 3 West.

N. 0°43.8' W., beginning new measurement.

20.009

The 1/4 section corner of sections 1 and 6, monumented with an aluminum post, 2 1/2 inches diameter, projecting 6 inches above ground, with an aluminum cap marked as described in the official record of the 2007 resurvey of the West boundary of Township 5 South, Range 3 West.

N. 0°20.7' W., beginning new measurement.

20.077

The N 1/16 section corner of sections 1 and 6, monumented with an aluminum post, 2 1/2 inches diameter, projecting 4 inches above ground, with an aluminum cap marked as described in the official record of the 2007 resurvey of the West boundary of Township 5 South, Range 3 West.

N. 0°20.7' W., beginning new measurement.

19.941

Intersect the First Standard Parallel South, and the true point for the closing corner of sections 1 and 6, on the South Boundary of section 36, T. 4 S., R. 2 W.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T4SR2E
S36
S1 S6
R2E R3E
T5S CC
2009

20.077

The 2007 closing corner, monumented with an aluminum post, 2 1/2 inches in diameter, projecting 6 inches above the ground, with aluminum cap marked as described in the official record of the 2007-08 resurvey, Group 1040.

I reset the aluminum post at its original position with the top of cap 6 inches below the ground, with AM marked on cap.

DEPENDENT RESURVEY OF THE WEST BOUNDARY OF
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Dependent Resurvey of the West Boundary of Township 5 South,
Range 2 East, Uinta Special Meridian, Utah

Reestablishment of the Survey Executed by
R.E.L. Collier & H. Rager in 1903

From the closing corner of sections 1 and 6, on the First
Standard Parallel South, hereinbefore described.

S. $0^{\circ}05.6'$ E., between sections 1 and 6.

39.960

The $1/4$ section corner of sections 1 and 6, monumented with a
flintstone, 18 X 5 X 3 inches, loosely set, plainly marked $1/4$
on west face, with a mound of stone and a steel fence post north
of the corner.

At the corner point

Set an aluminum post, 30 inches long, 2 $1/2$ inches diameter, 26
inches in the ground, with magnet at base, and aluminum cap
marked:

T5S
R1E $1/4$ R2E
S1 | S6
2008

Deposit the marked stone alongside the aluminum post.

S. $1^{\circ}07.1'$ W., beginning new measurement.

25.818

The closing corner of sections 1 and 6, at intersection with the
Uintah Indian Reservation Boundary, hereinbefore described.

Dependent Resurvey of the Subdivisional Lines in
Township 5 South, Range 2 East,
Uintah Special Meridian, Utah

Reestablishment of the Survey Executed by D.G. Major
in 1882 and the Survey and Retracement Executed by
R.E.L. Collier & H. Rager in 1903.

From the corner of sections 1, 6, 7 and 12, on the east boundary
of the township, hereinbefore described.

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

West, between sections 1 and 12.

- 8.639** Intersect the Southeast Boundary of the Uintah Indian Reservation, not monumented.
- 20.000** Point for the E 1/16 section corner of sections 1 and 12, point falls in the middle of thick brush and trees in the flood plain of the Green River where it is impracticable to set a corner, not monumented.
- 21.330** Intersect the thread of the dry North Channel of the Green River.
- 40.000** Point for the 1/4 section corner of sections 1 and 12, point falls in the middle of thick brush and trees in the flood plain of the Green River where it is impracticable to set a corner, not monumented.
- 55.387** Intersect the Right bank of the Green River, point for the meander corner of sections 1 and 12, not monumented.

From the closing corner of sections 1 and 2, on the First Standard Parallel South, hereinbefore described.

S. 0°18.6' W., between sections 1 and 2.

- 20.112** The N 1/16 section corner of sections 1 and 2, monumented with a decayed sandstone, firmly set, with illegible marks.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

N 1/16
S2 | S1
2008

Deposit the stone alongside the aluminum post.

Corner is located in a wide wash.

S. 0°19.7' E., beginning new measurement.

- 19.788** The 1/4 section corner of sections 1 and 2, is determined at record bearing and distance from corner No. 2 of Mineral Survey No. 5524, Green River No. 3 Lode, identical with corner No. 2 of Green River No. 3 East extension Lode, as recorded in the 1912 survey of Mineral Survey No. 6242, executed by H. D. Heist.

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Corner No. 2 of Mineral Survey No. 5524, Green River No. 3 Lode, identical with corner No. 2 of Green River No. 3 East extension Lode, bears, **S. 67°25.0' W., 15.959** chains distance; hereinafter described.

At the corner point

Set a brass tablet, 3 1/4 inches diameter, with a 3 1/2 inch stem, with magnet at base, flush with sandstone, in cement bond, into a drill hole on solid rock, in a collar of stone, 2 ft. base, marked:

1/4
T5SR2E
S2 | S1
2008

Set a steel fence post 1 link north of the aluminum post.

Corner is located on gentle north facing slope.

S. 0°02.9' W., beginning new measurement.

15.033 Intersect line 2-3 of Mineral Survey No. 5524, Green River No. 3 East Extension Lode.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 18 inches in the ground to solid rock, with magnet at base, in a mound of stone, 2 ft. base, 1 ft. high, with aluminum cap marked:

T5SR2E
S2 | S1
MS5524
2008

25.556 Intersect line 1-4 of Mineral Survey No. 5524, Green River No. 3 East Extension Lode.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

MS5524
T5SR | 2E
S2 | S1
2008

34.085 The closing corner of sections 1 and 2, at intersection with the

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Uintah Indian Reservation Boundary; hereinbefore described.

Reestablishment of the Survey Executed
by R.E.L. Collier & H. Rager in 1903

From the closing corner of sections 2 and 3, on the First
standard parallel South; hereinbefore described.

S. $0^{\circ}07.3'$ E., between sections 2 and 3.

39.936 The $1/4$ section corner of sections 2 and 3, monumented with a
sandstone, 10 X 8 X 4 inches, loosely set, plainly marked $1/4$ on
west face, with a mound of stone west of the corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 18
inches in the ground to solid rock, with magnet at base, in a
mound of stone, 3 ft. base, 12 inches high, with aluminum cap
marked:

T5SR2E
1/4
S3 | S2
2008

Deposit the marked stone at the base of the mound of stone.

Corner is located on a north facing slope, surrounded by loose
boulders.

S. $0^{\circ}00.6'$ E., beginning new measurement.

36.210 Intersect line 2-3 of Mineral Survey No. 5526, Green River No. 5
West Extension Lode.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24
inches in the ground, with magnet at base, in a mound of stone,
3 ft. base to top of aluminum cap marked:

T5SR2E
S3 | S2
MS5526
2008

Corner is located on top of small finger ridge, extends NW-SE.

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

- 40.019** The corner of sections 2, 3, 10 and 11, monumented with a black sandstone, 24 X 8 X 6 inches, firmly set, 2 inches in the ground, plainly marked with 5 notches on south and 2 notches on east edges, with a steel fence post and a mound of stone west of the corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground to solid rock, with magnet at base, in a mound of stone, 4 ft. base to top of aluminum cap marked:

T5SR2E	
S3	S2
S10	S11
2008	

Deposit the marked stone at the base of the mound of stone.

Corner is located on south facing slope of a ridge,
extends E-W.

N. 89°58.0' E., between sections 2 and 11.

- 5.364** Intersect line 2-3 of Mineral Survey No. 5526, Green River No. 5 West Extension Lode.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 4 inches in the ground to solid rock, with magnet at base, in a mound of stone, 4 ft. base to top of aluminum cap marked:

T5SR2E	
S2	
MS5526	S11
2008	

Corner is located 30 links east of small drainage, course south.

- 19.924** Point for the W 1/16 section corner of sections 2 and 11. Not monumented.

- 39.848** The 1/4 section corner of sections 2 and 11, monumented with a sandstone, 23 X 7 X 6 inches, in a scattered mound of stone, plainly marked 1/4 on north face; with a steel fence post set alongside.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

T5SR2E
S2
1/4 ———
S11
2008

Deposit the marked stone alongside the aluminum post.

Corner is located on south side of a flat ridge, extending east.

S. 89°51.4' E., beginning new measurement.

- 9.141 Intersect line 1-4 of Mineral Survey No. 5525, Green River No. 4 lode.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground to solid rock, with magnet at base, in a mound of stone, 3 ft. base, 8 inches high, with aluminum cap marked:

MS5525
S2
S11
T5SR2E
2008

- 14.853 Intersect line 1-4 of Mineral Survey No. 6244, Cliff Dweller lode. Not monumented.

- 19.956 Intersect line 2-3 of Mineral Survey No. 6244, Cliff Dweller lode. Not monumented.

- 20.140 Point for the E 1/16 section corner of sections 2 and 11.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with magnet at base, and aluminum cap marked:

E 1/16 ——— S2
S11
2008


Set a steel fence post alongside the aluminum post.

- 25.467 Intersect line AP1-3 of Mineral Survey No. 5525, Green River No. 4 lode.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground to solid rock, with magnet at base, in a mound of stone, 2 ft. base, 6 inches high, with aluminum cap marked:

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS




- 38.044** The closing corner of sections 2 and 11, at intersection with the Uintah Indian Reservation Boundary; hereinbefore described.
-

From the corner of sections 2, 3, 10 and 11.

S. 0°03.6' E., between sections 10 and 11.

- 7.251** Intersect line 1-4 of Mineral Survey No. 5526, Green River No. 5 West Extension Lode.


Set a brass tablet, 3 1/4 inches diameter, 3 1/2 inch stem, with magnet at base, flush with sandstone, in cement bond, into a drill hole on solid rock, marked:



Corner is located on sandstone shelf, extends NE-SW.

- 19.994** Point for the N 1/16 section corner of sections 10 and 11.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 12 inches in the ground to solid rock, with magnet at base, in a mound of stone, 4 ft. base to top of aluminum cap marked:



- 39.988** The 1/4 section corner of sections 10 and 11, monumented with a sandstone, 20 X 10 X 5 inches, firmly set, projecting 16 inches above the ground, plainly marked 1/4 on west face, with a scattered mound of stone west of the corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SOUTHEAST BOUNDARY
OF THE UINTAH INDIAN RESERVATION IN TOWNSHIP 5 SOUTH,
CHAINS RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

4.995 Point for angle point 24, falls in the flood plain of the Green River in dense stands of willow and scattered cottonwoods. There is no remaining evidence of the original corner, not monumented.

N. 68°18.3' W., beginning new measurement.

6.585 Intersect the line between sections 1 and 12, not monumented.

13.994 Point for the 6 mile corner, falls in the flood plain of the Green River in dense stand of willow undergrowth. There is no remaining evidence of the original corner, not monumented.

N. 68°18.3' W., on the 7th Mile of the Uintah Indian Reservation boundary.

16.992 Point for angle point 25, falls in the flood plain of the Green River with dense willow undergrowth, and scattered cottonwoods. There is no remaining evidence of the original corner, not monumented.

N. 84°33.6' W., beginning new measurement.

22.996 Point for 6.5 mile corner, falls in the flood plain of the Green River with dense willow undergrowth, and scattered cottonwoods. There is no remaining evidence of the original corner, not monumented.

N. 84°33.6' W., beginning new measurement.

6.499 Point for angle point 26, falls in the flood plain of the Green River with scattered willow and cottonwoods. There is no remaining evidence of the original corner, not monumented.

N. 70°48.4' W., beginning new measurement.

9.496 Angle point 27, monumented with an aluminum post, 2 1/2 inches diameter, firmly set, projecting 6 inches above the ground, with aluminum cap marked as described in the official record of the 2007-08 resurvey, Group 1040, Utah.

Reestablishment of the Survey Executed by A.H. Brown and F.M.
Brown in 1903.

S. 55°11.8' W., beginning new measurement.

4.761 Intersect the right bank of the Green River.

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

T5SR2E
1/4
S10 | S11
2008

Deposit the marked stone alongside the aluminum post.

Corner is located on a north slope of a bluff.

S. 0°24.1' E., beginning new measurement.

39.948 Point for the corner of sections 10, 11, 14 and 15, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
S10 | S11
S15 | S14
2008

Corner is located in 10 ft. high sand dune.

N. 89°38.4' E., between sections 11 and 14.

20.007 Point for the W 1/16 section corner of sections 11 and 14.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:


W 1/16 S11
 S14
 2008

29.640 Point selected for the witness closing corner of sections 11 and 14.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS



Set steel fence post alongside iron post.

Corner is located on a steep, sandy, east facing slope.

- 29.860** The true point for the closing corner of sections 11 and 14, at intersection with the Uintah Indian Reservation Boundary, falls on a steep sandy slope, impracticable to set a monument.
-


From the corner of sections 10, 11, 14 and 15.

S. 0°02.4' E., between sections 14 and 15.

- 39.947** The 1/4 section corner of sections 14 and 15, monumented with a cobble stone, 13 X 11 X 5 inches, firmly set, projecting 8 inches above the ground, plainly marked 1/4 on west face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:



Deposit the marked stone alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located 45 links south of dirt road, extends E-W.

S. 0°17.4' E., beginning new measurement.

- 19.997** Point for the S 1/16 section corner of sections 14 and 15.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

S 1/16

S15 | S14

2008

Set a steel fence post alongside the aluminum post.

Corner is located near the western edge of a flat plateau.

- 39.994** The corner of sections 14, 15, 22 and 23, monumented with a black sandstone, 17 X 10 X 4 inches, lying loose on north face, plainly marked with 2 notches on east edge and flaked on south edge, with a mound of stone, 3 ft. base, 1 1/2 ft. high, west of the corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 6 inches in the ground to solid rock, over top of a rebar, 1/2 inch diameter, 16 inches long, in cement bond, in drill hole, 12 inches deep, and aluminum cap marked:

T5SR2E
S15 | S14
S22 | S23
2008

Rebuilt mound of stone, 3 ft. base to top of aluminum cap.

Deposit the marked stone at the base of the mound of stone.

S. 89°43.7' E., between sections 14 and 23.

- 12.333** The closing corner of sections 14 and 23, at intersection with the Uintah Indian Reservation Boundary, hereinbefore described.
-

From the corner of sections 14, 15, 22 and 23.

S. 0°08.9' W., between sections 22 and 23.

- 19.875** The closing corner of sections 22 and 23, at intersection with the Uintah Indian Reservation Boundary, hereinbefore described.
-

From the corner of sections 14, 15, 22 and 23.

N. 89°57.0' W., between sections 15 and 22.

- 38.476** The closing corner of sections 15 and 22, at intersection with the Uintah Indian Reservation Boundary, hereinbefore described.
-

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

From the true point for the closing corner of sections 3 and 4,
on the First Standard Parallel South.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20
inches in the ground to solid earth, with magnet at base, and
aluminum cap marked:

S4	S3
T5S C C R2E	
2008	

S. 0°04.7' E., between sections 3 and 4.

0.050 The 1903 closing corner monumented with a decayed sandstone 20 X
15 X 7 inches, projecting 14 inches above the ground, no visible
marks. This sandstone is the only rock within search area, and
is accepted as the best available evidence of the original
corner position. I mark AM on the stone and bury it place.

39.984 The 1/4 section corner of sections 3 and 4, monumented with a
black sandstone, 30 X 8 X 7 inches, firmly set, projecting 17
inches above the ground, plainly marked 1/4 on west face, with a
mound of stone, 3 ft. base, 1 1/2 ft. high, and a steel fence
post north of the corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 16
inches in the ground to solid rock, with magnet at base, in a
mound of stone, 4 ft. base to top of aluminum cap marked:

T5SR2E	
1/4	
S4	S3
2008	

Deposit the marked stone at the base of the mound of stone.

S. 0°03.7' E., beginning new measurement.

40.000 The corner of sections 3, 4, 9 and 10, monumented with a decayed
sandstone, 26 X 8 X 6 inches, loosely set in a scattered mound
of stone, plainly marked with 5 notches on south and 2 notches
on east faces.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26
inches in the ground, with magnet at base, and aluminum cap
marked:

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

T5SR2E
S4|S3
S9|S10
2008

Deposit the marked stone alongside the aluminum post.

Rebuilt mound of stone, 2 ft. base, 4 inches high, to top of aluminum cap.

From the corner of sections 2, 3, 10 and 11.

S. 89°58.0' W., between sections 3 and 10.

3.072 Intersect line 3-4 of Mineral Survey No. 5526, Green River No. 5 West Extension lode. Not monumented.

39.968 The 1/4 section corner of sections 3 and 10, monumented with a decayed sandstone, 16 X 10 X 5 inches, firmly set, projecting 5 inches above the ground, with a scattered mound of stone north of corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 8 inches in the ground to solid rock, with magnet at base, in a mound of stone, 4 ft. base to top of aluminum cap marked:

T5SR2E
S3
1/4 —————
S10
2008

Deposit the stone alongside the aluminum post.

Corner is located on east edge of a wide valley, extends N-S.

S. 89°53.1' W., beginning new measurement.

39.924 The corner of sections 3, 4, 9 and 10.

S. 0°04.3' E., between sections 9 and 10.

39.999 The 1/4 section corner of sections 9 and 10, monumented with a black sandstone, 25 X 8 X 7 inches, lying loose on west face, plainly marked 1/4 on west face, with a scattered mound of stone west, and an old survey lathe alongside.

At the corner point

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
1/4
S9 | S10
2008

Deposit the marked stone at the base of the mound of stone.

S. 0°04.7' E., beginning new measurement.

40.028 The corner of sections 9, 10, 15 and 16, monumented with a nonnative decayed and fragmented dark sandstone, set in a area surrounded by white sandstone, with remains of a pine stake alongside. This sandstone is accepted as the best available evidence of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 6 inches in the ground to solid rock, with magnet at base, in a mound of stone, 4 ft. base to top of aluminum cap marked:

T5SR2E
S9 | S10
S16 | S15
2008

Deposit the fragmented stone alongside the aluminum post.

Corner is located on top of spur, extends E-W.

From the corner of sections 10, 11, 14 and 15.

S. 89°51.7' W., between sections 10 and 15.

40.063 Point for the 1/4 section corner of sections 10 and 15, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

T5SR2E
S10
1/4 —————
S15
2008

Corner is located in dry lake pan with bluffs to the NE and south.

80.126 The corner of sections 9, 10, 15 and 16.

S. 0°04.1' E., between sections 15 and 16.

39.951 Point for the 1/4 section corner of sections 15 and 16, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
1/4
S16 | S15
2008

Corner is located on sandy bench, approximately 61 links south of a two track road, extends E-W.

54.924 The closing corner of sections 15 and 16, at intersection with the Uintah Indian Reservation Boundary, hereinbefore described.

From the closing corner of sections 4 and 5, on the First Standard Parallel South, hereinbefore described.

S. 0°05.1' E., between sections 4 and 5.

22.154 Intersect line 1-21 of mineral survey 5401, Florence Mining Claim.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T5S | R2E
S5 | S4
MS5401
2008

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

- 40.051** Point for the 1/4 section corner of sections 4 and 5, at proportionate distance there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

1/4
T5S | R2E
S5 | S4
2008

Set a steel fence post alongside the aluminum post.

- 68.895** Intersect line 5-6 of Mineral Survey No. 5401, Florence Mining Claim.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

MS 5401
S5 | S4
T5S | R2E
2008

Set a steel fence post alongside the aluminum post.

Corner is located on the north edge of drainage, course SE.

- 80.102** The corner of sections 4, 5, 8 and 9, determined at the center of a scattered mound of stone, 3 ft. base.

At the corner point, (center of the scattered mound)

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 12 inches in the ground to solid rock, with magnet at base, in a mound of stone, 3 ft. base to top of aluminum cap marked:

T5SR2E
S5 | S4
S8 | S9
2008

Corner is located on a SE facing slope.

From the corner of sections 3, 4, 9 and 10.

N. 89°12.8' W., between sections 4 and 9.

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

- 39.658** The 1/4 section corner of sections 4 and 9, monumented with a sandstone, 28 X 10 X 5 inches, firmly set in a scattered mound of stone, projecting 25 inches above the ground, with illegible marks.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, with magnet at base, in a mound of stone, 2 ft. base to top of aluminum cap marked:

	T5SR2E
	S4
1/4	_____
	S9
	2008

Deposit the marked stone at the base of the mound of stone.

Corner is located on SW facing slope.

S. 88°51.3' E., beginning new measurement.

- 40.309** The corner of sections 4, 5, 8 and 9.
-

S. 0°00.5' E., between sections 8 and 9.

- 40.218** The 1/4 section corner of sections 8 and 9, monumented with a black sandstone, 20 X 9 X 8 inches, firmly set, projecting 16 inches above the ground, with a mound of stone, 3 ft. base, 1 ft. high, west of the corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 4 inches in the ground to solid rock, with magnet at base, in a mound of stone, 4 ft. base to top of aluminum cap marked:

	T5SR2E
	1/4
S8	S9
	2008

Deposit the marked stone at the base of the mound of stone.

S. 0°02.7' E., beginning new measurement.

- 39.999** Point for the corner of sections 8, 9, 16 and 17, at proportionate distance; there is no remaining evidence of the

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

'X' marked into the sandstone face in the 1903 survey.

Set a brass tablet, 3 1/4 inches diameter, with a 3 1/2 inch stem, with magnet at base, flush with sandstone, in cement bond into a drill hole on solid rock, marked:

T5SR2E
S8 S9
S17 S16
2008

Corner is located on sandstone ledge, on side of south facing slope.

From the corner of sections 9, 10, 15 and 16.

S. 89°12.0' W., between sections 9 and 16.

40.023

The 1/4 section corner of sections 9 and 16, monumented with a flint stone, 19 X 9 X 4 inches, firmly set, projecting 14 inches above the ground, plainly marked 1/4 on north face, with a mound of stone, 2 ft. base, 2 ft. high, north of the corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
S9
1/4 —————
S16
2008

Deposit the marked stone alongside the aluminum post.

Rebuilt mound of stone, 3 ft. base, 3 ft. high.

Corner is located on the north slope of ridge, extends E-W.

N. 89°50.6' W., beginning new measurement.

40.021

The corner of sections 8, 9, 16 and 17.

S. 0°12.3' W., between sections 16 and 17.

4.926

The closing corner of sections 16 and 17, at intersection with the Uintah Indian Reservation Boundary, hereinbefore described.

CHAINS

DEPENDENT RESURVEY OF A PORTION OF THE SOUTHEAST BOUNDARY
OF THE UINTAH INDIAN RESERVATION IN TOWNSHIP 5 SOUTH,
RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

10.924 Angle point 28, is determined at record bearing and distance from the 1903 bearing object

A sandstone boulder, 5 1/2 X 5 1/2 X 6 ft., above ground, bears **N. 21° E., 13** links distance, marked xBO, with other marks illegible,

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
S1
AP28
UIR
2008



Set a steel fence post alongside the aluminum post.


Corner is located on the right bank of the Green River.

S. 28°57.0' W., beginning new measurement.

4.273 Point for the closing corner of sections 1 and 2, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

C C
T5S R2E
S2 S1
2008



Set a steel fence post alongside the aluminum post.

Corner is located on the right bank of the Green River.

10.887 Angle point 29, is determined at record bearing and distance from the 1903 bearing object;

A cliff face, bears **S. 85° 30' W., 35** links distance, dimly marked xBO.

At the corner point

Set a brass tablet, 3 1/4 inches diameter, with a 3 1/2 inch stem, with magnet at base, flush with sandstone, in cement bond, into a drill hole on a boulder, 9 1/2 X 2 1/2 X 3 ft. above the

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

From the corner of sections 8, 9, 16 and 17.

N. $89^{\circ}44.1'$ W., between sections 8 and 17.


- 7.558 The closing corner of sections 8 and 17, at intersection with the Uintah Indian Reservation Boundary, hereinbefore described.
-

From the closing corner of sections 5 and 6, on the First Standard Parallel South, hereinbefore described.

S. $0^{\circ}00.9'$ E., between sections 5 and 6.

- 1.390 Intersect line 1-21 of Mineral Survey No. 5401, Florence Mining Claim.


Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:



Corner is located on a gentle sandy south facing slope.

- 15.096 Intersect line 9-10 of Mineral Survey No. 5401 Florence Mining Claim.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 12 inches in the ground to solid rock, with magnet at base, in a mound of stone, 2 1/2 ft. base, 16 inches high, with aluminum cap marked:



Set a steel fence post alongside the aluminum post.

Corner is located in bottom of wide drainage, course west.

- 40.028 The 1/4 section corner of sections 5 and 6, monumented with a decayed sandstone, loosely set in a mound of stone, 3 ft. base, 6 inches high.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 25

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

inches in the ground, with magnet at base, and aluminum cap marked:

T5S 1/4 R2E
S6 | S5
2008

Deposit the broken stone alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on flat ground, draining south.

S. 0°07.5' W., beginning new measurement.

39.918 The corner of sections 5, 6, 7 and 8, monumented with a sandstone, 16 X 12 X 4 inches, loosely set in a mound of stone, 3 ft. base, 1 ft. high, and dimly marked.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with magnet at base, in a mound of stone, 3 ft. base to top of aluminum cap marked:

T5SR2E
S6 | S5
S7 | S8
2008

Set a steel fence post 3 links east of the aluminum post.

Corner is located on a low rise, on the west edge of a two track road.

From the corner of sections 4, 5, 8 and 9.

N. 89°51.8' W., between sections 5 and 8.

40.195 The 1/4 section corner of sections 5 and 8, monumented with a cobble stone, 14 X 8 X 6 inches, loosely set in a mound of stone, 2 ft. base, 1 1/2 ft. high, with illegible marks.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

T5SR2E
S5
1/4 —————
S8
2008

Deposit the stone alongside corner.

S. 89°59.8' W., beginning new measurement.

39.963 The corner of sections 5, 6, 7 and 8.

S. 0°04.4' W., between sections 7 and 8.

33.992 The closing corner of sections 7 and 8, monumented with a sandstone, 27 X 16 X 4 inches, lying loose, marked with UIR CC on north face, UUIR on south face, and 5 notches on east face, with a mound of stone, 3 ft. base, 1 ft. high, north of the corner. I marked AM on the north face and bury the stone in place

34.110 True point for the closing corner of sections 7 and 8, at intersection with the Uintah Indian Reservation Boundary.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

CC
T5SR2E
S7 | S8
 | UIR
S5 ————
T9SR19E
2008

Rebuilt mound of stone north of aluminum post.

Corner is located under barbed wire fence, extending NW-SE.

From the corner of sections 5, 6, 7 and 8.

S. 89°59.4' W., between sections 6 and 7.

39.941 The 1/4 section corner of sections 6 and 7, determined at the center of a scattered mound of stone, 3 ft. base, 6 inches high.

At the corner point, (center of the mound)

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26

DEPENDENT RESURVEY OF THE SUBDIVISIONAL LINES IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
S6
1/4 —————
S7
2008

Set a steel fence post along the north side of the aluminum post.

Corner is located on a gentle NE facing slope.

S. 89°50.8' W., beginning new measurement.

16.229 The closing corner of sections 6 and 7, at intersection with the Uintah Indian Reservation Boundary, hereinbefore described.

Dependent Resurvey of the Subdivision of section 1
by Three Mile Method in
Township 5 South, Range 2 East, Uintah Special Meridian, Utah

Reestablishment of the Survey Executed by D.G. Major
in 1882

From the S 1/16 section corner of sections 1 and 6, on the east boundary of the township, hereinbefore described.

S. 89°25.4' W., on the E-W centerline of the south 1/2 of section 1.

20.018 Point for the SE 1/16 section corner of section 1, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

SE 1/16 S1
2008

Corner is located in a fence line, extends E-W.

40.036 The center S 1/16 section corner of section 1, determined at the corner of barbed wire fences extending north and east, and is accepted as the best available evidence of the original corner position.

At the corner point

DEPENDENT RESURVEY OF THE SUBDIVISION OF SECTION 1
BY THREE MILE METHOD IN TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, with aluminum cap marked:

C
S 1/16 | S1
C
2008

From the center 1/4 section corner of section 1, determined at the corner of barbed wire fences encircled by a scattered mound of stone, with barbed wire fences extending south and west, and accepted as the best available evidence of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, with aluminum cap marked:

T5SR2E
C1/4 S1
2008

S. 88°19.4' W., on the E-W centerline of section 1.

19.716 The center W 1/16 section corner of section 1, determined at the corner of barbed wire fences extending east and SW, and accepted as the best available evidence of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, with aluminum cap marked:

W 1/16
C ————— C
S1
2008

Corner is located on the west side of a small knoll.

S. 89°16.9' W., beginning new measurement.

20.139 The 1/4 section corner of sections 1 and 2.

From the N 1/16 section corner of sections 1 and 6, on the east

DEPENDENT RESURVEY OF THE SUBDIVISION OF SECTION 1
BY THREE MILE METHOD IN TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

boundary of the township, hereinbefore described.

S. 89°11.2' W., on the E-W centerline of the North 1/2 of section 1.

- 20.022** Point for the NE 1/16 section corner of section 1, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

NE 1/16 S1
2008

Set a steel fence post alongside the aluminum post.

- 40.044** Point for the center N 1/16 section corner of section 1, monumented with a decayed sandstone, 14 X 11 X 8 inches, firmly set, no visible marks on the stone.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

C
N 1/16 | S1
C
2008

Deposit the stone alongside the aluminum post.

Set a steel fence post alongside the aluminum post.

Corner is located on a gentle SW facing slope.

S. 89°01.3' W., beginning new measurement.

- 20.041** Point for the NW 1/16 section corner of section 1, at proportionate distance, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF THE SUBDIVISION OF SECTION 1
BY THREE MILE METHOD IN TOWNSHIP 5 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

NW 1/16 S1

2008

Set a steel fence post alongside the aluminum post.

Corner is located in a drainage, course SE.

40.082 The N 1/16 section corner of sections 1 and 2.

The Subdivision of section 1 in
Township 5 South, Range 2 East, Uintah Special Meridian, Utah

From the center S 1/16 section corner of section 1.

N. 1°26.3' W., on the N-S centerline of section 1.

20.278 The center 1/4 section corner of section 1.

From the center N 1/16 section corner of section 1.

N. 0°04.3' W., on the N-S centerline of section 1.

19.215 The 1/4 section corner of section 1 only, on the First Standard
Parallel South; hereinbefore described.

From the NE 1/16 section corner of section 1.

N. 0°12.7' W., on the N-S centerline of the N 1/2 of the NE 1/4
of section 1.

19.514 The E 1/16 section corner of section 1 only, on the First
Standard Parallel South; hereinbefore described.

From the NW 1/16 section corner of section 1.

N. 0°07.4' E., on the N-S centerline of the N 1/2 of the NW 1/4
of section 1.

19.674 The W 1/16 section corner of section 1 only, on the First
Standard Parallel South; hereinbefore described.

The Subdivision of section 2 in
Township 5 South, Range 2 East, Uintah Special Meridian, Utah

From the 1/4 section corner of sections 2 and 11.

THE SUBDIVISION OF SECTION 2 IN TOWNSHIP 5 SOUTH,
RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

N. 0°05.7' E., on the N-S centerline of section 2.

- 5.652 Intersect line 1-4 of Mineral Survey No. 5525, Green River No. 4, West Extension lode. Not monumented.
- 16.390 Intersect line 2-3 of Mineral Survey No. 5525, Green River No. 4, West Extension lode. Not monumented.
- 40.025 Point for the center 1/4 section corner of section 2 at intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 8 inches in the ground to solid rock, with magnet at base, in a mound of stone, 4 ft. base, 20 inches high, with aluminum cap marked:

T5SR2E
C1/4 S2
2008

Corner is located on a gentle north facing slope.

- 42.790 Intersect line 2-3 of Mineral Survey No. 6242, Green River No. 2 lode. Not monumented.
- 46.258 Intersect line 1-4 of Mineral Survey No. 6242, Green River No. 2 lode. Not monumented.
- 79.947 The 1/4 section corner of section 2 only, on the First Standard Parallel South; hereinbefore described.

From the 1/4 section corner of sections 1 and 2.

S. 89°57.5' W., on the E-W centerline of section 2.

- 21.399 Point for the center E 1/16 section corner of section 2.
- Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 16 inches in the ground to solid rock, with magnet at base, in a mound of stone, 3 ft. base, 1 ft. high, with aluminum cap marked:

E 1/16
C ————— C
S2
2008

Set a steel fence post alongside the aluminum post.


Corner is located on east edge of a small drainage, course SW.

- 24.706 Intersect line 2-3 of Mineral Survey No. 5524, Green River No. 3 lode.

THE SUBDIVISION OF SECTION 2 IN TOWNSHIP 5 SOUTH,
RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Set a brass tablet, 3 1/4 inches diameter, with a 3 1/2 inch stem, with magnet at base, flush with sandstone, in cement bond into a drill hole on solid rock, marked:




30.452 Intersect line 1-4 of Mineral Survey No. 6242, Green River No. 2 lode. Not monumented.

36.603 Intersect line 2-3 of Mineral Survey No. 6242, Green River No. 2 lode. Not monumented.

37.635 Intersect line 3-4 of Mineral Survey No. 5524, Green River No. 3 lode.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:



Set a steel fence post alongside the aluminum post.

Corner is located on west edge of a ridge, extends N-S.

41.501 The center 1/4 section corner of section 2.

81.418 The 1/4 section corner of sections 2 and 3.

From the E 1/16 section corner of sections 2 and 11.

N. 0°02.7' E., on the N-S centerline of the SE 1/4 of section 2.

3.822 Intersect line AP1-3 of Mineral Survey No. 5525, Green River No. 4 lode. Not monumented.

27.503 Intersect line 1-4 of Mineral Survey No. 5524, Green River No. 3 lode. Not monumented.

31.959 Intersect line 2-3 of Mineral Survey No. 6242, Green River No. 1 lode. Not monumented.

35.298 Intersect line 1-4 of Mineral Survey No. 6242, Green River No. 1 lode. Not monumented.

38.060 Intersect line 2-3 of Mineral Survey No. 5524, Green River No. 3 lode.

THE SUBDIVISION OF SECTION 2 IN TOWNSHIP 5 SOUTH,
RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Set a brass tablet, 3 1/4 inches diameter, with a 3 1/2 inch stem, with magnet at base, flush with sandstone, in cement bond into a drill hole on solid rock, marked:

E
S 2
E
5524
2008

Raise a mound of stone north of the aluminum post.

40.089 The center E 1/16 section corner of section 2.

The Subdivision of section 11 in
Township 5 South, Range 2 East, Uintah Special Meridian, Utah

From the 1/4 section corner of sections 10 and 11.

N. 89°48.2' E., on the E-W centerline of section 11, determined by averaging bearings of the west 1/2 miles of the north and south boundaries of section 11.

19.985 Point for the center W 1/16 section corner of section 11.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 8 inches in the ground to underlying solid rock, with magnet at base, in a mound of stone, 4 ft. base to top of aluminum cap marked:

W 1/16
C ————— C
S11
2008

39.970 Point for the center 1/4 section corner of section 11 at intersection with the N-S center line.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, with magnet at base, in a mound of stone, 2 1/2 ft. base to top of aluminum cap marked:

T5SR2E
C1/4 S11
2008

Corner is located on clayey west facing slope.

44.343 Intersect the Uintah Indian Reservation Boundary, hereinbefore described.

CHAINS

DEPENDENT RESURVEY OF A PORTION OF THE SOUTHEAST BOUNDARY
OF THE UINTAH INDIAN RESERVATION IN TOWNSHIP 5 SOUTH,
RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

ground, marked:

T5SR2E
AP29
S2
UIR
2008

S. 47°17.6' W., beginning new measurement.

- 0.406 Point for the closing corner of sections 2 and 11, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
C S2
C S11
UIR
2008

Set a steel fence post alongside the aluminum post.

- 2.223 Milepost 7, is determined at record bearing and distance from the 1903 bearing object

A cliff face bears S. 75° W., 35 links distance, dimly marked xBO.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
7M UIR
S11
2008

Set a steel fence post alongside the aluminum post.

S. 39°26.1' W., on the 8th Mile of the Uintah Indian Reservation Boundary.

- 10.345 Angle point 30, is determined at record bearing and distance from the 1903 bearing object

A rock face, 20 X 10 X 6 ft., bears N. 76° 15' W., 15 links distance, marked X UIR BO.

THE SUBDIVISION OF SECTION 11 IN TOWNSHIP 5 SOUTH,
RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

From the center 1/4 section corner of section 11.

N. $0^{\circ}13.9'$ W., on the N-S centerline of section 11, parallel with the west boundary of section 11.

7.971 Intersect line 2-3 of Mineral Survey No. 6241, Black Butte No. 1 lode. Not monumented.

11.374 Intersect line 1-2 of Mineral Survey No. 6241, Black Butte No. 1 lode. Not monumented.

19.937 Point for the center N 1/16 section corner of section 11.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, with magnet at base, in a mound of stone, 3 ft. base to top of aluminum cap marked:

C
N 1/16 | S11
C
2008

Corner is located at base of large boulder on steep SE slope.

39.874 The 1/4 section corner of sections 2 and 11.

From the W 1/16 section corner of sections 11 and 14.

N. $0^{\circ}25.8'$ W., on the N-S centerline of the SW 1/4 of section 11.

39.892 The center W 1/16 section corner of section 11.

N. $0^{\circ}08.6'$ W., on the N-S centerline of the NW 1/4 of section 11.

18.419 Intersect line 1-4 of Mineral Survey No. 5526, Green River No. 5 lode.

Set a brass tablet, 3 1/4 inches diameter, with a 3 1/2 inch stem, with magnet at base, flush with sandstone, in cement bond into a drill hole on solid rock, marked:

MS5526
W
S | 11
W
2008

THE SUBDIVISION OF SECTION 11 IN TOWNSHIP 5 SOUTH,
RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Corner is located on a N-S rock face and a wash, draining south is approximately 30 links west of corner.

- 19.966 Point for the NW 1/16 section corner of section 11 at intersection with the E-W centerline of the NW 1/4.

Set a brass tablet, 3 1/4 inches diameter, with a 3 1/2 inch stem, with magnet at base, flush with sandstone, in cement bond into a drill hole on a boulder, 12.3 X 3.6 X 4.6 ft. above ground, marked:


NW 1/16 S11

2008

Corner is located on shelf, extends NE-SW.

- 29.561 Intersect line 2-3 of Mineral Survey No. 5526, Green River No. 5 lode.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:



Raise a collar of stone, 2 ft. base, around the aluminum post.


- 39.932 The point for the W 1/16 section corner of sections 2 and 11.

From the center N 1/16 section corner of section 11.

S. 89°53.1' W., on the E-W centerline of the NW 1/4 of section 11.

- 6.659 Intersect line 2-3 of Mineral Survey No. 5526, Green River No. 5 lode.

Set a brass tablet, 3 1/4 inches diameter, with a 3 1/2 inch stem, with magnet at base, flush with sandstone, in cement bond into a drill hole on a boulder, 8 1/2 X 7 X 3 ft. above ground, marked:



THE SUBDIVISION OF SECTION 11 IN TOWNSHIP 5 SOUTH,
RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Corner is located on shelf, extends N-S.

- 11.736 Intersect line 1-2 of Mineral Survey No. 6241, Black Butte No. 1 lode. Not monumented.
- 16.824 Intersect line 3-4 of Mineral Survey No. 6241, Black Butte No. 1 lode. Not monumented.
- 19.954 The NW 1/16 section corner of section 11.
- 22.111 Intersect line 1-4 of Mineral Survey No. 5526, Green River No. 5 lode. Not monumented.
- 39.908 The N 1/16 section corner of sections 10 and 11.

The Subdivision of section 14 in
Township 5 South, Range 2 East, Uintah Special Meridian, Utah

From the S 1/16 section corner of sections 14 and 15.

S. 89°53.0' E., on the E-W centerline of the SW 1/4 of section 14, on a mean bearing of the E-W centerline and the south boundary of section 14. The E-W centerline was determined on a mean bearing of the north and south boundaries of section 14.

- 15.901 Intersect the Uintah Indian Reservation Boundary.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:

$$\begin{array}{c} \text{S} \quad \frac{\text{S}}{14} \quad \text{S} \\ \quad \quad \text{DIR} \\ \quad \quad 2008 \end{array}$$

Set a steel fence post alongside the aluminum post.

Corner is located in the Green River bottom, surrounded by thick underbrush.

Dependent Resurvey of Mineral Survey No. 5401 in
Township 5 South, Range 2 East, Uintah Special Meridian, Utah

Reestablishment of the Survey Executed
by J. Glenn in 1905

Mineral Survey No. 5401

From Corner No. 1 of Mineral Survey No. 5401, monumented with a


DEPENDENT RESURVEY OF MINERAL SURVEY No. 5401 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

cobble stone, 19 X 8 X 7 inches, plainly marked with an X on top, with a mound of stone, 3 ft. base, 1 ft. high, south of the corner.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:



Deposit the marked stone alongside the aluminum post.


Raise a mound of stone, 3 ft. base, 6 inches high, around the aluminum post.

S. 4°59.8' E., along line 1-2.

32.768 Corner No. 2, monumented with a triangular sandstone, 28 inches long, loosely set.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:



Deposit the marked stone alongside the aluminum post.

Thence, **S. 16°49.1' W.**, along line 2-3.

5.457 Corner No. 3, determined at the center of a mound of stone, 3 ft. base, 3 ft. high. No evidence found of the 1905 X marked on sandstone.

At the corner point, (center of the mound)

Set a brass tablet, 3 1/4 inches diameter, 3 1/2 inch stem, with magnet at base, flush with sandstone, in cement bond into a drill hole on solid rock, marked:

DEPENDENT RESURVEY OF MINERAL SURVEY No. 5401 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

MS5401
3 T5S
R2E
S4
2008

Thence, **S. 57°13.0' W.**, along line 3-4.

- 7.260** Corner No. 4, monumented with a sandstone boulder, 11 X 8 X 6 ft. above ground, plainly marked with an X on top and 4 on north face.

At the corner point

Set a brass tablet, 3 1/4 inches diameter, 3 1/2 inch stem, with magnet at base, flush with sandstone, in cement bond into a drill hole on solid rock, marked:

MS5401
4
T5SR2E
S4
2008

Corner is located on a steep SE facing slope. The top of a plateau is approximately 230 links north of corner.

Thence, **N. 86°40.3' W.**, along line 4-5.

- 19.134** Corner No. 5, determined at the center of a scattered mound of stone, 2 ft. base.

At the corner point, (center of the mound)

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

MS5401
5
T5S
R2E S4
2008

Raise a mound of stone along the west side of the aluminum post.

Thence, **N. 74°56.9' W.**, along line 5-6.


- 16.184** Intersect the section line of sections 4 and 5, hereinbefore described.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 5401 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

- 27.408** Point for Corner No. 6, at proportionate distance based on the Grant Boundary adjustment; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:




Set a steel fence post alongside the aluminum post.

Corner is located at the top of drainage, course west.

Thence, **N. 15°03.1' E.**, along line 6-7.

- 39.530** Point for Corner No. 7, at proportionate distance based on the Grant Boundary adjustment; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:




Set a steel fence post alongside the aluminum post.

Thence, **N. 74°56.9' W.**, along line 7-8.

- 67.796** Point for Corner No. 8, at proportionate distance based on the Grant Boundary adjustment; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:



Set a steel fence post alongside the aluminum post.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 5401 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Corner is located on a gentle south facing sandy slope.

Thence, **S. 15°03.1' W.**, along line 8-9.

- 8.199** Corner No. 9, determined at the center of a mound of stone, 3 ft. base, 6 inches high.

At the corner point, (center of the mound)

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

MS5401
9
T5SR2E
S5
2008

Raise a collar of stone around the aluminum post.

Corner is located on the south edge of a gulch, course SW.

Thence, **N. 76°00.6' W.**, along line 9-10.

- 12.238** Intersect the section line of sections 5 and 6, hereinbefore described.

- 30.255** Point for Corner No. 10, at proportionate distance based on the Grant Boundary adjustment; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
S6
10
2008
MS5401

Set a steel fence post alongside the aluminum post.

Corner is located on a gentle north facing sandy slope.

Thence, **N. 13°59.3' E.**, along line 10-11.

- 6.051** Point for Corner No. 11, at proportionate distance based on the Grant Boundary adjustment; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 12

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 5401 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

inches in the ground to solid rock, with magnet at base, in a mound of stone, 3 ft. base, 16 inches high, with aluminum cap marked:

MS5401
T5SR2E
S6
2008
11

Set a steel fence post alongside the aluminum post.

Corner is located on flat clay like ground.

Thence, **N. 76°00.7' W.**, along line 11-12.

20.025 Intersect the south boundary of section 31, First Standard Parallel South, Township 4 South, Range 2 East, hereinbefore described.

28.742 Corner No. 12, monumented with a decayed sandstone, 24 X 8 X 4 inches, loosely set in a mound of stone.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with magnet at base, in a mound of stone, 2 ft. base to top of aluminum cap marked:

T4SR2E
MS5401
12
S31
2008

Corner is located on flat ground, sloping gently SW.

Thence, **S. 14°28.6' W.**, along line 12-13.

2.192 Intersect the south boundary of section 31, First Standard Parallel South, Township 4 South, Range 2 East, hereinbefore described.

15.142 Point for Corner No. 13 at proportionate distance based on the Grant Boundary adjustment; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, in a mound of stone, 3 ft. base to top of aluminum cap marked:

DEPENDENT RESURVEY OF MINERAL SURVEY No. 5401 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UTAH SPECIAL MERIDIAN, UTAH

CHAINS

MS
5401
13 S6
T5SR2E
2008

Set a steel fence post alongside the aluminum post.

Thence, N. 75°31.4' W., along line 13-14.

30.284 Corner No. 14, monumented with a decayed gypsum, firmly set in a mound of stone, 2 ft. base, 6 inches high.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E MS5401
14
S6
2008

Corner is located on rolling ground.

Thence, N. 14°26.1' E., along line 14-15.

5.074 Intersect the south boundary of section 31, First Standard Parallel South, Township 4 South, Range 2 East, hereinbefore described.

7.600 Corner No. 15, monumented with a decayed gypsum, firmly set in a mound of stone, 2 ft. base, 6 inches high.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T4SR2E MS5401
15
S31
2008

Corner is located on rolling ground.


From Corner No. 20 of Mineral Survey No. 5401, Township 4 South, Range 2 East, monumented with a decayed sandstone, 23 X 11 X 3 inches, loosely set in a mound of stone, 2 ft. base, 6 inches high.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 5401 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, in a mound of stone, 2 ft. base to top of aluminum cap marked:




Deposit the stone at base of the mound of stone.

S. 14°30.6' W., along line 20-21.

7.474 Point for Corner No. 21 at proportionate distance based on the Grant Boundary adjustment; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:



Set a steel fence post alongside the aluminum post.

Corner is located on a gentle north facing sandy slope.

Thence, S. 75°29.4' E., along line 21-1.

- 9.067 Intersect the south boundary of section 31, First Standard Parallel South, Township 4 South, Range 2 East, hereinbefore described.
- 14.601 Intersect the section line of sections 5 and 6, hereinbefore described.
- 97.219 Intersect the section line of sections 4 and 5, hereinbefore described.
- 138.148 Corner No. 1 of this survey, hereinbefore described.

Dependent Resurvey of Mineral Survey No. 5524 in
Township 5 South, Range 2 East, Uintah Special Meridian, Utah

CHAINS

DEPENDENT RESURVEY OF A PORTION OF THE SOUTHEAST BOUNDARY
OF THE UINTAH INDIAN RESERVATION IN TOWNSHIP 5 SOUTH,
RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 21 inches in the ground, with magnet at base, and aluminum cap marked:

T5S
R2E UIR
S11
AP30
2008

S. 49°43.6' W., beginning new measurement.

- 0.558 Intersect line 3-4 of mineral survey 6244, Cliff Dweller lode, not monumented.
- 1.624 Intersect line 1-4 of mineral survey 6244, Cliff Dweller lode, not monumented.
- 2.189 Point for angle point 31, at proportionate distance, based on the broken boundary (compass-rule) adjustment, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
UIR
AP31
S11
2008

S. 40°56.3' W., beginning new measurement.

- 21.213 Angle point 32, monumented with a boulder, 15 1/2 X 6 X 3 ft. above the ground, marked <UIR on NW face.

At the corner point

Set a brass tablet, 3 1/4 inches diameter, with a 3 1/2 inch stem, with magnet at base, flush with sandstone, in cement bond into a drill hole on solid rock, marked:

T5S
R2E UIR
S11
AP32
2008

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 5524 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Reestablishment of Mineral Survey 5524

Green River No. 3 Lode

From corner No. 2 of Green River No. 3 lode, identical with Corner No. 2 of Green River No. 3, East Extension lode, monumented with a pine post, 28 X 4 X 4 inches, loosely set in the center of a scattered mound of stone, 3 ft. base, 6 inches high.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
S2
2/2
MS5524
2008

Deposit the pine post alongside the aluminum post.

Raise a mound of stone around the aluminum post.

Corner is located on a west facing slope.

Thence, **N. 58°29.9' W.**, along line 2-3, with an informative traverse.

- 7.818** Intersect the N-S centerline of the SE 1/4 of section 2, hereinbefore described.
- 11.695** Intersect the E-W centerline of section 2, hereinbefore described.
- 22.734** Corner No. 3, monumented with a decayed pine post, firmly set in the center of a scattered mound of stone.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
S2
3
MS5524
2008

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 5524 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Deposit the pine post alongside the aluminum post.

Raise a collar of stone, 3 ft. base, around the aluminum post.

Corner is located at the top of small ridge, extends E-W.

Thence, **S. 31°19.9' W.**, along line 3-4, with an informative traverse.

3.229 Intersect line 1-4 of Mineral Survey No. 6242, Green River No. 2 lode.

6.253 Intersect line 2-3 of Mineral Survey No. 6242, Green River No. 2 lode.

6.763 Intersect the E-W centerline of section 2, hereinbefore described.

8.977 Corner No. 4, monumented with a decayed pine post, firmly set in the center of a mound of stone, 2 ft. base, 6 inches high.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:

Deposit the pine post alongside the aluminum post.

Raise a collar of stone, 2 ft. base, 6 inches high, around the aluminum post.

Corner is located on the north side of a ridge, extends N-S.

Thence, **S. 58°25.0' E.**, along line 4-1.

20.400 Intersect the N-S centerline of the SE 1/4 of section 2.

22.736 Corner No. 1 of Green River No. 3 lode, identical with Corner No. 1 of Green River No. 3 East Extension lode, monumented with a pine post, 48 X 5 X 5 inches.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 5524 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UTAH SPECIAL MERIDIAN, UTAH

CHAINS

MS5524
1/1
S2
T5SR2E
2008

Corner is located in drainage, extremely susceptible to erosion.

Green River No. 3, East Extension Lode.

From Corner No. 2, identical with Corner No. 2 of Green River No. 3 lode, hereinbefore described.

S. 58°50.0' E., along line 2-3.

17.206 Intersect the section line of sections 1 and 2, hereinbefore described, with an informative traverse with continuous measurement.

22.727 Corner No. 3, is determined at record bearing and distance from Corner No. 2.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

MS5524
T5SR2E
3 S1
2008

Thence, S. 31°19.7' W., along line 3-4, with an informative traverse.

9.010 Corner No. 4, is determined at record bearing and distance from Corner No. 1.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

MS5524
4
S1
T5SR2E
2008

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 5524 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Thence, **N. 58°50.0' W.**, along line 4-1, with an informative traverse.

0.057 Intersect the section line of sections 1 and 2, hereinbefore described, with an informative traverse with continuous measurement.

22.727 Corner No. 1, identical with Corner No. 1 of Green River No. 3 lode, hereinbefore described.

Dependent Resurvey of Mineral Survey No. 5525 in
Township 5 South, Range 2 East, Uintah Special Meridian, Utah

Reestablishment of Mineral Survey 5525

Green River No. 4 Lode

From Corner No. 2 of Green River No. 4 lode, identical with Corner No. 2 of Green River No. 4, West Extension Lode, monumented with a pine post, 48 X 4 X 4 inches, projecting 2 ft. above the ground, in the center of a mound of stone, 3 ft. base, 1 ft. high.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
S2
2/2
MS5525
2008

Deposit the pine post alongside the aluminum post.
Raise a collar of stone around the aluminum post.

Corner is located on the south edge of a drainage, course east.

11.575 Thence, **S. 58°07.1' E.**, along line 2-AP1.
Point for angle point No. 1, at proportionate distance based on the Grant Boundary adjustment; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

DEPENDENT RESURVEY OF MINERAL SURVEY No. 5525 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

T5SR2E
S2
AP1
MS5525
2008

Thence, S. 54°13.7' E., along line AP1-3.

- 0.418 Intersect the N-S center line of the SE 1/4 of section 2, not monumented.
- 6.978 Intersect the section line of sections 2 and 11, hereinbefore described.

Thence with an informative traverse, with continuous measurement.

- 11.181 Corner No. 3, identical with Corner No. 3 of Green River No. 4, East Extension lode, monumented with a pine post, 48 X 4 X 4 inches, firmly set, projecting 2 ft. above the ground, in the center of a scattered mound of stone.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
S11
3/3
MS5525
2008

Thence, S. 32°22.9' W., along line 3-4, with an informative traverse.

- 8.985 Corner No. 4, identical with Corner No. 4 of Green River No. 4 East Extension Lode, monumented with a pine post, 48 X 4 X 4 inches, wedged between two large boulders.

At the corner point

Set a brass tablet, 3 1/4 inches diameter, 3 1/2 inch stem, with magnet at base, flush with sandstone, in cement bond into a drill hole on solid rock, marked:

MS5525
4/4
T5S
R2E
S11
2008

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 5525 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Corner is located between two large boulders, on a sandstone ledge near the south and east cliff faces.

Thence, N. $54^{\circ}27.8'$ W., along line 4-AP2, with an informative traverse.

- 11.142 Point for angle point No. 2, at proportionate distance based on the Grant Boundary adjustment, there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

MS5525
AP2
S11
T5SR2E
2008

Thence, N. $58^{\circ}20.8'$ W., along line AP2-1, with an informative traverse.

- 6.880 Intersect the section line of sections 2 and 11, hereinbefore described.

Thence with a resurvey, with continuous measurement.

- 11.535 Corner No. 1 of Green River No. 4 lode, identical with Corner No. 1 of Green River No. 4, West Extension Lode, monumented with a pine post, loosely set in the center of a mound of stone, 3 ft. base, 1 ft. high.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 18 inches in the ground, with magnet at base, in a mound of stone, 3 ft. base to top of aluminum cap marked:

MS5525
1 / 1
S2
T52R2E
2008

Deposit the pine post alongside the aluminum post.

Corner is located on the north face of a ridge, extends SE.

Green River No. 4, West Extension Lode

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 5525 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

From Corner No. 2 of Green River No. 4, West Extension lode, identical with Corner No. 2 of Green River No. 4, hereinbefore described.

N. $57^{\circ}48.9'$ W., along line 2-3.

11.753 Intersect the N-S centerline of section 2, not monumented.

22.741 Corner No. 3, monumented with a decayed pine post, loosely set.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
S2
3
MS5525
2008

Deposit the decayed pine post alongside the aluminum post.

Corner is located in the middle of flat ground, surrounded by greasewood and sage brush.

Thence, S. $32^{\circ}12.3'$ W., along line 3-4.

9.146 Corner No. 4, monumented with a decayed pine post, loosely set.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
S2
4
MS5525
2008

Deposit the decayed pine post alongside the aluminum post.

Corner is located on flat ground, surrounded by low greasewood and sage brush.

Thence, S. $57^{\circ}59.0'$ E., along line 4-1.

16.696 Intersect the N-S center line of section 2, not monumented.

22.791 Corner No. 1, identical with Corner No. 1 of Green River No. 4

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 5525 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

lode, hereinbefore described.

Dependent Resurvey of Mineral Survey No. 5526 in
Township 5 South, Range 2 East, Uintah Special Meridian, Utah

Reestablishment of Mineral Survey 5526

Green River No. 5 Lode

From corner No. 1, of Green River No. 5 lode, identical with
Corner No. 4 of Green River No. 5 East Extension Lode,
determined at the center of a mound of stone, 3 ft. base, 1 ft.
high.

At the corner point, (center of the mound)

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26
inches in the ground, with magnet at base, and aluminum cap
marked:

MS5526
1 / 4
S11
T5SR2E
2008

Raise a mound of stone, 3 ft. base to top of aluminum cap.

Corner is located in bottom of a gulch, course SW.

Thence **N. 35°21.5' E.**, along line 1-2, identical with line 4-3
of Green River No. 5 East Extension lode, with an informative
traverse.

8.987 Corner No. 2, identical with Corner No. 3 of Green River No. 5
East Extension lode, monumented with a pine post, 48 X 4 X 4
inches, firmly set, projecting 3 1/2 ft. above the ground.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 16
inches in the ground to bedrock, with magnet at base, in a mound
of stone, 2 ft. base, 1 ft. high, with aluminum cap marked:

T5SR2E
S11
2 / 3
MS5526
2008

Corner is located on a ledge, facing SE.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 5526 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Thence, N. $54^{\circ}18.5'$ W., along line 2-3, with an informative traverse.

- 4.272 Intersect the E-W centerline of the NW 1/4 of section 11, hereinbefore described.

Thence with a resurvey with continuous measurement.

- 20.672 Intersect the N-S centerline of the NW 1/4 of section 11, hereinbefore described.

- 22.693 Corner No. 3, identical with Corner No. 2 of Green River No. 5 West Extension lode, determined at the center of a scattered mound of stone.

At the corner point, (center of the mound.)

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 16 inches in the ground to solid rock, with magnet at base, in a mound of stone, 3 ft. base, 1 ft. high, with aluminum cap marked:

T5SR2E
S11
2/3
MS5526
2008

Corner is located on a north facing slope of a drainage, course SE.

Green River No. 5, West Extension Lode

Thence N. $54^{\circ}38.9'$ W., along line 2-3.

- 15.871 Intersect the section line of sections 2 and 11, hereinbefore described.

- 22.448 Intersect the section line of sections 2 and 3, hereinbefore described.

Thence with an informative traverse, with continuous measurement.

- 22.735 Corner No. 3, monumented with a pine post, 48 X 4 X 4 inches, firmly set in the center of a mound of stone, 4 ft. base, 2 ft. high.


At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, on

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 5526 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

solid rock, with magnet at base, in a mound of stone, 27 inches high, with aluminum cap marked:



Deposit the pine post at base of the mound of stone.

Corner is located on north edge of flat ridge, extends east.


Thence, **S. 35°30.8' W.**, along line 3-4, with an informative traverse.

4.885 Intersect the section line of sections 3 and 10.

8.997 Corner No. 4, monumented with a pine post, loosely set in the center of a mound of stone.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, on solid rock, with magnet at base, in a mound of stone, 2 ft. base, 20 inches high, with aluminum cap marked:



Deposit the pine post at base of the mound of stone.

Corner is located on east edge of a deep wash, surrounded by boulders.

Thence, **S. 54°29.5' E.**, along line 4-1, with an informative traverse.

6.718 Intersect the section line of sections 10 and 11, hereinbefore described.

Thence with a resurvey, with continuous measurement.

22.726 Corner No. 1, identical with Corner No. 4 of Green River No. 5 Lode, determined at midpoint and on line between Corner No. 1 of Green River No. 5 Lode and Corner No. 4 of Green River No. 5 West Extension lode.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:

CHAINS

DEPENDENT RESURVEY OF A PORTION OF THE SOUTHEAST BOUNDARY
OF THE UINTAH INDIAN RESERVATION IN TOWNSHIP 5 SOUTH,
RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

Corner is located on a small ridge, extends NE.

S. $71^{\circ}57.7'$ W., beginning new measurement.

2.104 Angle point 33, is determined at record bearing and distance from the 1903 bearing object.

A rock face, bears N. $7^{\circ}30'$ W., 10 links distance, marked X UIR BO.

At the corner point

Set a brass tablet, 3 1/4 inches diameter, with a 3 1/2 inch stem, with magnet at base, flush with sandstone, in cement bond into a drill hole on solid rock, marked:

T5SR2E
UIR
S11 / AP33
2008

Corner is located on the south edge of a sandstone ridge, extends east.

S. $39^{\circ}36.0'$ W., beginning new measurement.

3.994 Point for Milepost 7.5, at proportionate distance based on the broken boundary (compass-rule) adjustment; there is no remaining evidence of the original corner. Point falls on a rock shelf where it is impracticable to set a monument. Not monumented.

11.983 Point for angle point 34, at proportionate distance based on the broken boundary (compass-rule) adjustment; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
S11
AP34 /
UIR
2008

from which an unrecorded bearing object

A sandstone boulder, 15 X 6 X 6 ft. above the ground, bears N. $46^{\circ}30.8'$ W., 103 links distance, marked X <UIRBO on south face.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 5526 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

MS5526
4 / 1
S11
T5SR2E
2008

Green River No. 5 lode

Thence, S. 54°29.5' E., along line 4-1.

5.870 Intersect the E-W center line of the NW 1/4 of section 11.

8.525 Intersect the N-S center line of the NW 1/4 of section 11,
hereinbefore described.

Thence with an informative traverse, with continuous
measurement.

22.726 Corner No. 1, identical with Corner No. 4 of Green River No. 5
East Extension Lode, and point of beginning.

Dependent Resurvey of Mineral Survey No. 5540 in
Township 5 South, Range 2 East, Uintah Special Meridian, Utah

Reestablishment of the Survey Executed
by O.H. Aikine in 1906

Copper King Lode

From Corner No. 1 of the Copper King lode, monumented with a
sandstone, 24 X 12 X 7 inches, firmly set.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27
inches in the ground, with magnet at base, and aluminum cap
marked:

T5SR2E
S5
1
MS5540
2008

Corner is located on NW facing sandy slope.


DEPENDENT RESURVEY OF MINERAL SURVEY NO. 5540 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

S. $74^{\circ}15.4'$ E., along line 1-2.

- 9.077 Point for Corner No. 2, parallel and equidistance with line 3-4, hereinafter described. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 28 inches in the ground, with magnet at base, and aluminum cap marked:



Set a steel fence post alongside the aluminum post.


Corner is located on the west end of a small hollow.

Thence, S. $15^{\circ}37.3'$ W., along line 2-3.

- 22.737 Corner No. 3, monumented with a decayed sandstone, 24 X 9 X 8 inches, set in a scattered mound of stone, 2 ft. base, plainly marked with an X on top, other marks are illegible.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 18 inches in the ground to solid rock, with magnet at base, in a mound of stone, 3 ft. base to top of aluminum cap marked:



Corner is located on a NW facing slope. The top of cliff, 15 ft. high, bears approximately 45 links north of corner.

Thence, N. $74^{\circ}15.4'$ W., along line 3-4.

- 9.077 Corner No. 4, determined at record bearing and distance from the discovery point.


From which the discovery point bears S. $76^{\circ}29.0'$ E., 4.548 chains distance.

At the corner point

DEPENDENT RESURVEY OF MINERAL SURVEY No. 5540 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Set a brass tablet, 3 1/4 inches diameter, 3 1/2 inch stem, with magnet at base, flush with sandstone, in cement bond into a drill hole on solid rock, marked:

T5S
R2E
S5  MS5540
2008

Corner is located in the bottom of a small wash, course west.

From this corner, the corner of sections 5, 6, 7 and 8, bears
S. 57°39.9' W., 33.031 chains distance.

Thence, N. 15°37.2' E., along line 4-1.

22.737

Corner No. 1 and point of beginning.

Dependent Resurvey of Mineral Survey No. 6241 in
Township 5 South, Range 2 East, Uintah Special Meridian, Utah


Reestablishment of the Survey Executed
by H.D. Heist in 1912

Black Butte No. 1 Lode

From Corner No. 1 of the Black Butte No. 1 lode, determined at the center of a scattered mound of stone. Found a decayed cottonwood post, 24 X 4 X 4 inches, lying loose on the ground near the scattered mound.

At the corner point, (center of the mound)

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

MS5526
 MS6241
2008

Deposit the decayed cottonwood post alongside the aluminum post. Corner is located on a south facing slope.

S. 54°02.4' E., along line 1-2.

6.137

Intersect the E-W centerline of the NW 1/4 of section 11.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 6241 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH


CHAINS

20.677 Intersect the N-S center line of section 11.

22.664 Point for corner No. 2, is established at a point which is parallel and equidistance with line 3-4.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:



Corner is located on steep NW facing slope.


Thence, S. 35°24.5' W., along line 2-3.

2.752 Intersect the N-S centerline of section 11.

2.996 Corner No. 3, monumented with a decayed cottonwood post, 4 inches square, 3 feet long, loosely set in a mound of stone.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 16 inches in the ground, with magnet at base, in a mound of stone, 5 foot base, 10 inches high, and aluminum cap marked:



Deposit original post alongside corner.

Corner is located on a south facing slope of ledge rock and surrounded by small boulders. The top of the ridge is approximately 2 chains north and 70 feet above the corner.

Thence, N. 54°02.4' W., along line 3-4.

20.666 Intersect the E-W centerline of the NW 1/4 of section 11.


DEPENDENT RESURVEY OF MINERAL SURVEY NO. 6241 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

- 22.664 Corner No. 4 of this survey, determined at the center of a mound of stone. Found a slightly decayed cottonwood post, 40 X 4 X 4 inches, lying loose on the ground, downhill from the mound of stone.

At the corner point, in the center of the mound

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, with magnet at base, in a mound of stone, 3 ft. base to top of aluminum cap marked:



Thence, N. 35°24.3' E., along line 4-1.

- 2.996 Corner No. 1 and point of beginning.


Dependent Resurvey of Mineral Survey No. 6242 in
Township 5 South, Range 2 East, Uintah Special Meridian, Utah

Reestablishment of the Survey Executed
by H.D. Heist in 1912

Green River No. 1 Lode

From the point for Corner No. 1 of the Green River No. 1 Lode, is established at a point which is parallel and equidistance with line 2-3, hereinafter described. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:



S. 29°32.4' W., along line 1-2.


- 3.024 Corner No. 2, monumented with a cottonwood post, 27 X 3 X 3 inches, loosely set in the center of a scattered mound of stone, 2 ft. base, 6 inches high.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 6242 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UTAH SPECIAL MERIDIAN, UTAH

CHAINS

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:



MS6242
2
MS5524
2008

Deposit the cottonwood post alongside the aluminum post.

Corner is located near the top of the south side of a drainage, descending east.


Thence, N. 64°34.8' W., along line 2-3.

17.314 Intersect the N-S centerline of the SE 1/4 of section 2.

22.944 Corner No. 3, identical with Corner No. 2 of Green River No. 2 Lode, monumented with a pine post, 18 X 5 X 5 inches, loosely set in the center of a mound of stone, 2 ft. base, 1 ft. high.

At the corner point

Set a brass tablet, 3 1/4 inches diameter, 3 1/2 inch stem, with magnet at base, flush with sandstone, in cement bond into a drill hole on solid rock, marked:



MS6242
2 / 3
MS5524
2008

Corner is located on a rock shelf, in the center of original corner, 8 inches below the top of a mound of stone, 2 ft. base, 1 ft. high.

Green River No. 2 Lode

N. 60°34.5' W., along line 2-3.

11.608 Intersect the E-W centerline of section 2.

12.492 Intersect line 3-4 of mineral survey 5524, Green River No. 3 lode.


17.229 Intersect the N-S centerline of section 2.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 6242 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

- 22.705 Point for Corner No. 3 established at a point which is parallel and equidistance with line 4-1, hereinafter described. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 8 inches in the ground to solid rock, with magnet at base, in a mound of stone, 3 ft. base, 1 1/2 ft. high, with aluminum cap marked:




Corner is located on a gentle north facing slope.

Thence, N. 29°32.0' E., along line 3-4.

- 3.024 Corner No. 4, determined at the center of a mound of stone, 3 ft. base, 1 ft. high.

At the corner point, (center of the mound)

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 18 inches in the ground to solid rock, with magnet at base, in a mound of stone, 3 ft. base, 10 inches high, with aluminum cap marked:



Corner is located on a gentle SW facing slope.

Thence, S. 60°34.5' E., along line 4-1.

- 3.771 Intersect the N-S centerline of section 2.
- 10.307 Intersect line 3-4 of mineral survey 5524, Green River No. 3 lode.
- 16.443 Intersect the E-W centerline of section 2.
- 22.705 Corner No. 1, identical with Corner No. 4 of Green River No. 1 Lode, monumented with a pine post, 42 X 5 X 5 inches, with illegible marks, firmly set in the center of a mound of stone, 5 ft. base, 2 ft. high.
At the corner point
Set a brass tablet, 3 1/4 inches diameter, 3 1/2 inch stem, with

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 6242 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

magnet at base, flush with sandstone, in cement bond into a
drill hole on solid rock, marked:

MS5524
1/4
MS6242
2008

Deposit the pine post alongside the aluminum post.

Corner is located in the center of a stone mound, 1 ft. below
the top of mound.

Green River No.1 Lode

S. 64°34.8' E., along line 4-1.

3.983 Intersect the N-S centerline of the SE 1/4 of section 2.

22.944 Corner No. 1 and point of beginning.

Dependent Resurvey of Mineral Survey No. 6244 in
Township 5 South, Range 2 East, Uintah Special Meridian, Utah

Reestablishment of the Survey Executed
by H.D. Heist in 1912

Cliff Dweller Lode

From Corner No. 1 of the Cliff Dweller lode, monumented with a
cottonwood post, firmly set in a mound of stone, 3 ft. base, 1
ft. high.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 18
inches in the ground to solid rock, with magnet at base, in a
mound of stone, 4 ft. base, 1 ft. high, with aluminum cap
marked:

MS5525
1
MS6244
2008

Deposit the cottonwood post alongside the aluminum post.

Corner is located on a east facing sandstone ledge, extends N-S.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 6244 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH


CHAINS

N. $42^{\circ}01.0'$ E., along line 1-2.

- 3.028 Corner No. 2, monumented with a cottonwood post, firmly set in the center of a mound of stone, 3 ft. base, 1 1/2 ft. high.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 10 inches in the ground to solid rock, with magnet at base, in a mound of stone, 5 ft. base, 20 inches high, with aluminum cap marked:




Deposit the cottonwood post alongside the aluminum post.

Corner is located on the west end of a small hollow.

Thence, S. $53^{\circ}40.0'$ E., along line 2-3.

- 7.864 Intersect the section line of sections 2 and 11.
- 16.741 Intersect line 3-4 of mineral survey 5525, Green River No. 4 lode.
- 21.371 Point selected for the witness corner of Corner No. 3 of this survey.
- Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with magnet at base, and aluminum cap marked:



Corner is located on the right bank of the Green River.

- 21.626 True point for Corner No. 3 established at record bearing and distance from corner No. 2, falls in the Green River.

Thence, S. $42^{\circ}01.2'$ W., along line 3-4.

- 1.986 Intersect the Uintah Indian Reservation Boundary.
- 3.028 True point for Corner No. 4, established at record bearing and distance from Corner No. 3, falls in the Green River.

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 6244 IN TOWNSHIP 5
SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

Thence, N. 53°40.0' W., along line 4-1.

0.184 Point selected for the witness corner of Corner No. 4.

Set a brass tablet, 3 1/4 inches diameter, with a 3 1/2 inch stem, with magnet at base, flush with sandstone, cemented into a drill hole in solid rock, with brass tablet marked:

MS
6244
4/WC
T5SR2E
S11
2008

Corner is located on the right bank of the Green River. The base of a cliff bears west, 15 links from corner.

17.581 Intersect the section line of sections 2 and 11.

21.626 Corner No. 1 and point of beginning.

Dependent Resurvey of Mineral Survey No. 6245 in
Township 4 South, Range 2 East, Uintah Special Meridian, Utah

Reestablishment of the Survey Executed
by H.D. Heist in 1912

Little Boy Lode

From Corner No. 1 of the Little Boy Lode, identical with Corner No. 4 of the Little Boy No. 2 Lode, determined at the center of an embedded mound of stone, 1 1/2 ft. base, 6 inches high.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 16 inches in the ground to solid rock, with magnet at base, in a mound of stone, 2 ft. base, 1 ft. high, with aluminum cap marked:

MS6249
4/1
T4S
R2E
S36
2008

Set a steel fence post alongside the aluminum post.

S. 46°25.9' E., along line 1-4.

DEPENDENT RESURVEY OF A PORTION OF THE SOUTHEAST BOUNDARY
OF THE UINTAH INDIAN RESERVATION IN TOWNSHIP 5 SOUTH,
CHAINS RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

S. $7^{\circ}02.5'$ W., beginning new measurement.

3.241 Intersect the E-W centerline of section 11. Point falls 2 feet from the right bank in the Green River; it is impracticable to set a monument. Not monumented.

7.983 Point for angle point 35, at proportionate distance based on the broken boundary (compass-rule) adjustment; there is no remaining evidence of the original corner. Point falls on a steep rock face where it is impracticable to set a monument. Not monumented.

S. $12^{\circ}33.2'$ W., beginning new measurement.

5.888 Point for angle point 36, at proportionate distance based on the broken boundary (compass-rule) adjustment; there is no remaining evidence of the original corner. Point falls in an area where it is impracticable to set a monument. Not monumented.

S. $14^{\circ}33.4'$ W., beginning new measurement.

4.192 Point for angle point 37, at proportionate distance based on the broken boundary (compass-rule) adjustment; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 25 inches in the ground, with magnet at base, and aluminum cap marked:

T5S
R2E
AP37
S11
UIR
2008

S. $50^{\circ}21.8'$ W., beginning new measurement.

1.299 Point for angle point 38, at proportionate distance based on the broken boundary (compass-rule) adjustment; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 27 inches in the ground, with magnet at base, and aluminum cap marked:

T5SR2E
S11
AP38
UIR
2008

CHAINS


DEPENDENT RESURVEY OF MINERAL SURVEY NO. 6245 IN
TOWNSHIP 4 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

- 15.473 Intersect the south boundary of section 36, First Standard Parallel South, hereinbefore described.
- 22.288 Corner No. 4, determined at record bearing and distance from Shaft No. 3.

From which Shaft No. 3, bears **N. 37°28.3' W., 9.481** chains distance.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:




Set a steel fence post alongside the aluminum post.

Thence, **N. 43°55.4' E.,** along line 4-3.

- 3.020 Point for Corner No. 3 established at a point which is parallel and equidistance with line 1-4. There is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:



Set a steel fence post alongside the aluminum post.

Thence, **N. 46°25.9' W.,** along line 3-2.

- 3.621 Intersect the south boundary of section 36, First Standard Parallel South, hereinbefore described.
- 22.288 Point for Corner No. 2 of this survey, identical with Corner No. 3 of the Little Boy No. 2 Lode, established at a point which is parallel and equidistance with line 1-4, of Little Boy No. 2 Lode. There is no remaining evidence of the original corner.

CHAINS

DEPENDENT RESURVEY OF MINERAL SURVEY NO. 6245 IN
TOWNSHIP 4 SOUTH, RANGE 2 EAST,
UINTAH SPECIAL MERIDIAN, UTAH

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

Set a steel fence post alongside the aluminum post.

Dependent Resurvey of Mineral Survey No. 6249 in
Township 4 South, Range 2 East, Uintah Special Meridian, Utah

Reestablishment of the Survey Executed
by H.D. Heist in 1912

Little Boy No. 2 Lode

N. 46°28.7' W., along line 3-2.

20.783

Corner No. 2 of this survey, determined at the center of a scattered mound of stone, 2 ft. base, 1 ft. high.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

Set a steel fence post alongside the aluminum post.

Thence, S. 43°55.1' W., along line 2-1.


DEPENDENT RESURVEY OF MINERAL SURVEY No. 6249 IN
TOWNSHIP 4 SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

3.020 Corner No. 1 of this survey, determined at the center of a scattered mound of stone.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 26 inches in the ground, with magnet at base, and aluminum cap marked:

T4SR2E
S36 

Thence, S. 46°28.7' E., along line 1-4.

20.783 Corner No. 4, identical with corner No. 1, Little Boy Lode.

Survey of a portion of the North Channel of the Green River,
within secs. 1 and 12 of Township 5 South, Range 2 East, Uintah
Special Meridian, Utah

Reestablishment of the Surveys Executed by D.G. Major
in 1882, and A.H. & F.M. Brown in 1903

Downstream with the thread of the North Channel of the Green
River, in sections 1 and 12. The North Channel of the Green
River is dried up with no water.

Beginning at the intersect with
the E-Bdy. of the Township

N. 74°28.4' W., 0.614 chs.

N. 68°24.9' W., 5.310 chs.

N. 46°00.6' W., 4.894 chs.

N. 28°57.0' W., 3.503 chs.

N. 4°14.1' W., 8.344 chs.

N. 28°06.7' E., 2.889 chs.

N. 56°02.9' E., 6.781 chs.

N. 37°14.1' E., 2.896 chs.

N. 17°25.6' W., 1.518 chs.

N. 63°51.9' W., 3.325 chs.

SURVEY OF A PORTION OF THE NORTH CHANNEL OF THE GREEN RIVER,
WITHIN SECS. 1 AND 12 OF TOWNSHIP 5 SOUTH, RANGE 2 EAST, UINTAH
SPECIAL MERIDIAN, UTAH

N. 83°16.4' W., 1.998 chs.
S. 83°20.1' W., 6.026 chs.
N. 77°06.0' W., 4.852 chs.
N. 61°20.3' W., 2.928 chs. Intersect the section line of
sections 1 and 12, not monumented.
N. 61°20.3' W., 5.914 chs.
N. 60°23.7' W., 4.668 chs.
N. 64°47.3' W., 8.469 chs.
N. 83°18.2' W., 3.112 chs.
S. 70°24.7' W., 2.171 chs.
S. 84°45.6' W., 5.977 chs.
S. 73°27.9' W., 8.334 chs. Intersect the right bank of the
Green River.

Survey of a portion of the Present Meanders of the Main Channel
of the Green River, within sections 1 and 12 of Township 5
South, Range 2 East, Uintah Special Meridian, Utah

Reestablishment of the Surveys Executed by D.G. Major
in 1882, and A.H. & F.M. Brown in 1903

Downstream with the meanders of the right bank of the Green River, in sections 1 and 12, along a well defined cut bank, 6 to 10 feet high, through heavy timber.

Beginning at the meander corner of sections 7 and 12 at the intersection with the east boundary of the township.

N. 82°15.5' W.,	0.992 chs.
S. 81°32.2' W.,	14.310 chs.
S. 81°52.7' W.,	6.072 chs.
N. 64°32.1' W.,	13.260 chs.
N. 51°01.5' W.,	9.994 chs.
N. 32°10.7' W.,	8.226 chs.
N. 20°15.9' W.,	7.151 chs.

SURVEY OF A PORTION OF THE PRESENT MEANDERS OF THE MAIN CHANNEL
OF THE GREEN RIVER, WITHIN SECTIONS 1 AND 12 OF TOWNSHIP 5
CHAINS SOUTH, RANGE 2 EAST, UINTAH SPECIAL MERIDIAN, UTAH

- N. $14^{\circ}52.7'$ W., 17.502 chs.
- N. $18^{\circ}06.3'$ W., 10.203 chs. Intersect the section line of sections 1 and 12, a meander corner hereinbefore described
- N. $18^{\circ}06.3'$ W., 5.191 chs. Intersect the left bank of the north channel of the Green River
- N. $30^{\circ}52.9'$ W., 0.620 chs. Intersect the thread of the north channel of the Green River
- N. $30^{\circ}52.9'$ W., 0.620 chs. Intersect the right bank of the north channel of the Green River
- N. $35^{\circ}15.4'$ W., 5.225 chs.
- N. $73^{\circ}24.8'$ W., 6.298 chs.
- N. $81^{\circ}58.4'$ W., 4.085 chs.
- S. $81^{\circ}38.6'$ W., 2.848 chs. Intersect the Southeast Bdy. of the Uintah Indian Reservation

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS



Name	Capacity
Daniel T. Gillins	Cadastral Surveyor
Michael Thompson	Cadastral Surveyor
Matthew N. Gillins	Surveying Technician
Adrian Kurip	Surveying Technician
Chris May	Surveying Technician

CERTIFICATE OF SURVEY

I, Ronald K. Batty, Cadastral Surveyor, under the supervision of Ronald K. Baugh, Supervisory Cadastral Surveyor, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions bearing the date of the 18th day of July, 2008, have dependently resurveyed the south boundary (First Standard Parallel South), and resurveyed Mineral Survey numbers 6245 and 6249 in T. 4 S., R. 2 E., resurveyed portions of the southeast and southwest boundaries of the Uintah Indian Reservation, the east and west boundaries, the subdivisional lines, the subdivision of sections 1, 2, 11 and 14, and the resurvey of Mineral Survey numbers 5401, 5524, 5525, 5526, 5540, 6241, 6242, and 6244 in Township 5 South, Range 2 East, of the Uintah Special Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by us and under our direction; and that said survey has been made in strict conformity with said Special Instructions, the Manual of Instructions of the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

Jan 14, 2010
Date

Jan 14, 2010
Date

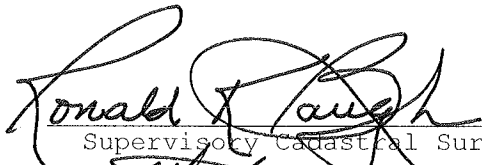

Supervisory Cadastral Surveyor

Cadastral Surveyor

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt Lake City, Utah

The following field notes of the dependent resurvey of the south boundary (first standard parallel south), and the dependent resurvey of Mineral Survey numbers 6245 and 6249 in T. 4 S., R. 2 E., the resurvey of portions of the southeast and southwest boundaries of the Uintah Indian Reservation, the east and west boundaries, the subdivisional lines, the subdivision of sections 1, 2, 11 and 14, and the resurvey of Mineral Survey numbers 5401, 5524, 5525, 5526, 5540, 6241, 6242, and 6244 in Township 5 South, Range 2 East, Uintah Special Meridian, Utah, executed by Ronald K. Batty, Cadastral Surveyor, under the supervision of Ronald K. Baugh, Supervisory Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

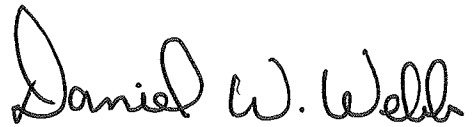May 14, 2010
Date


Chief Cadastral Surveyor for Utah

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF THE
SOUTH BOUNDARY (FIRST STANDARD PARALLEL SOUTH), AND
THE RESURVEY OF MINERAL SURVEY NUMBERS 6245 AND 6249 IN
TOWNSHIP 4 SOUTH, RANGE 2 EAST,
PORTIONS OF THE SOUTHEAST AND SOUTHWEST BOUNDARIES
OF THE UINTAH INDIAN RESERVATION,
THE WEST BOUNDARY, THE EAST BOUNDARY, THE SUBDIVISIONAL LINES,
THE RESURVEY OF MINERAL SURVEY NUMBERS 5401, 5524,
5525, 5526, 5540, 6241, 6242 AND 6244
AND THE SUBDIVISION OF SECTIONS 1, 2, 11, AND 14,
IN
TOWNSHIP 5 SOUTH, RANGE 2 EAST
OF THE UINTAH SPECIAL MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Ronald K. Batty
Cadastral Surveyor

Under the Supervision of Ronald K. Baugh
Supervisory Cadastral Surveyor

Under Special Instructions dated *July 18, 2008*, approved *July 18, 2008*,
which provided for the surveys included under Group Number *1076*, and
assignment instructions dated *July 18, 2008*.

Survey commenced *July 29, 2008*
Survey completed *May 22, 2009*

INDEX DIAGRAM

Township 5 South, Range 2 East

26	25	24	22	21	18
33 6	50 5	46 4	43 3	36 2	34 1 32
52 7	51 8	47 9	44 10	37 11	33 12
18	50 17	49 16	45 15	40 14	13
19	20	21	42 22	42 23	24
30	29	28	27	26	25
31	32	33	34	35	36

Dependent Resurvey, Uintah Indian Reservation Boundary	Pages 3-18
The Subdivision of Section 1.....	Page 53
The Subdivision of Section 2.....	Page 56
The Subdivision of Section 11.....	Page 59
The Subdivision of Section 14.....	Page 62
Mineral Survey No. 5401.....	Page 62
Mineral Survey No. 5524.....	Page 69
Mineral Survey No. 5525.....	Page 73
Mineral Survey No. 5526.....	Page 77
Mineral Survey No. 5540.....	Page 80
Mineral Survey No. 6241.....	Page 82
Mineral Survey No. 6242.....	Page 84
Mineral Survey No. 6244.....	Page 87
Mineral Survey No. 6245.....	Page 89
Mineral Survey No. 6249.....	Page 91
Meanders of the Green River.....	Page 92